



<https://cloudblue.com>

[Documentation](#) [Developer Resources](#) [Connect REST API](#) [REST API Clients](#)

Postman

This article has been generated from the online version of the documentation and might be out of date. Please, make sure to always refer to the online version of the documentation for the up-to-date information.

Auto-generated at February 19, 2026

Postman is a collaboration platform for API development. Postman's features simplify each step of building an API and streamline collaboration so you can create better APIs. Download the Postman REST API client from www.postman.com.

This article describes how to successfully import API specification to Postman and how to start working with the Connect API.

Prerequisites

Before starting to work with the Postman client, make sure that all prerequisites are met.


Namely, it is required to create a **Custom** token, assign required permissions and copy your **API Key/Handle** value.



Furthermore, make sure that Postman uses correct **API endpoint** for making calls.


API Specification Import

First, get familiar with the API specification and download the required file via our Open API specification page.

After that, open the Postman client and import API specification as described below:

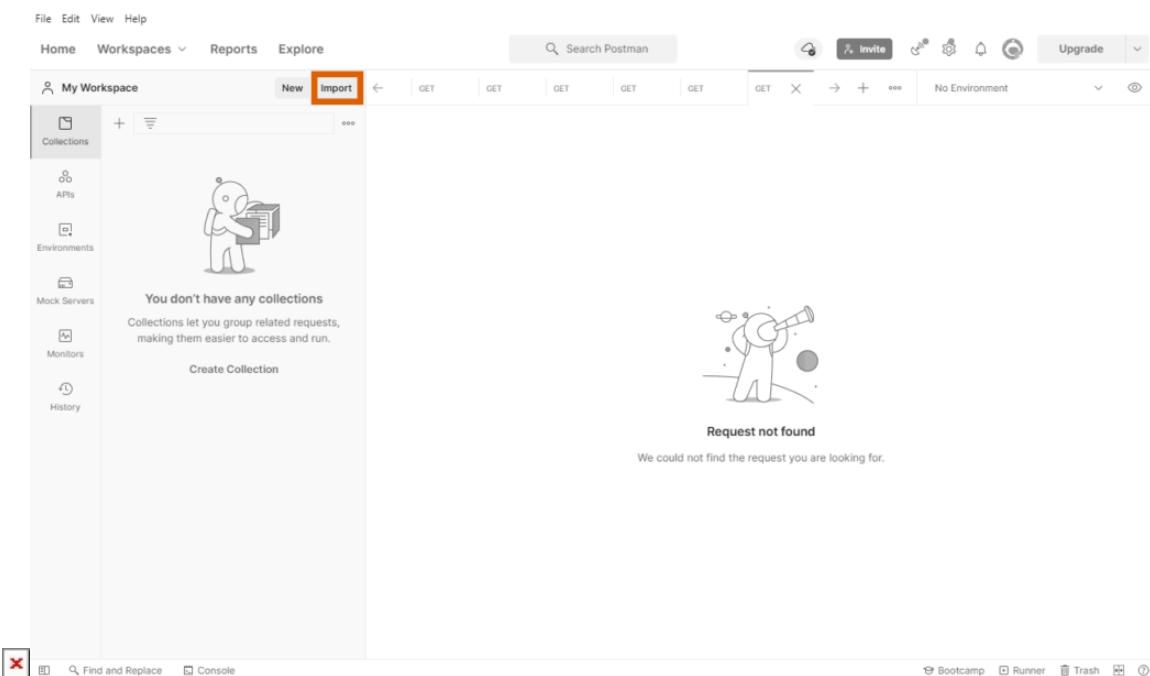

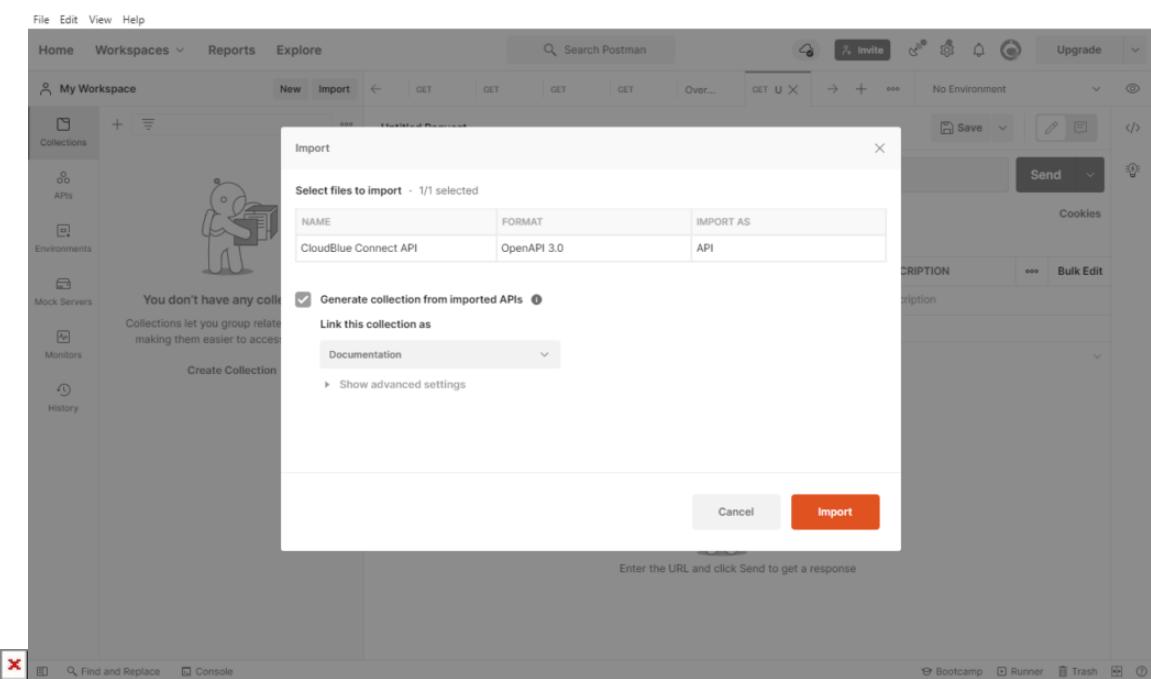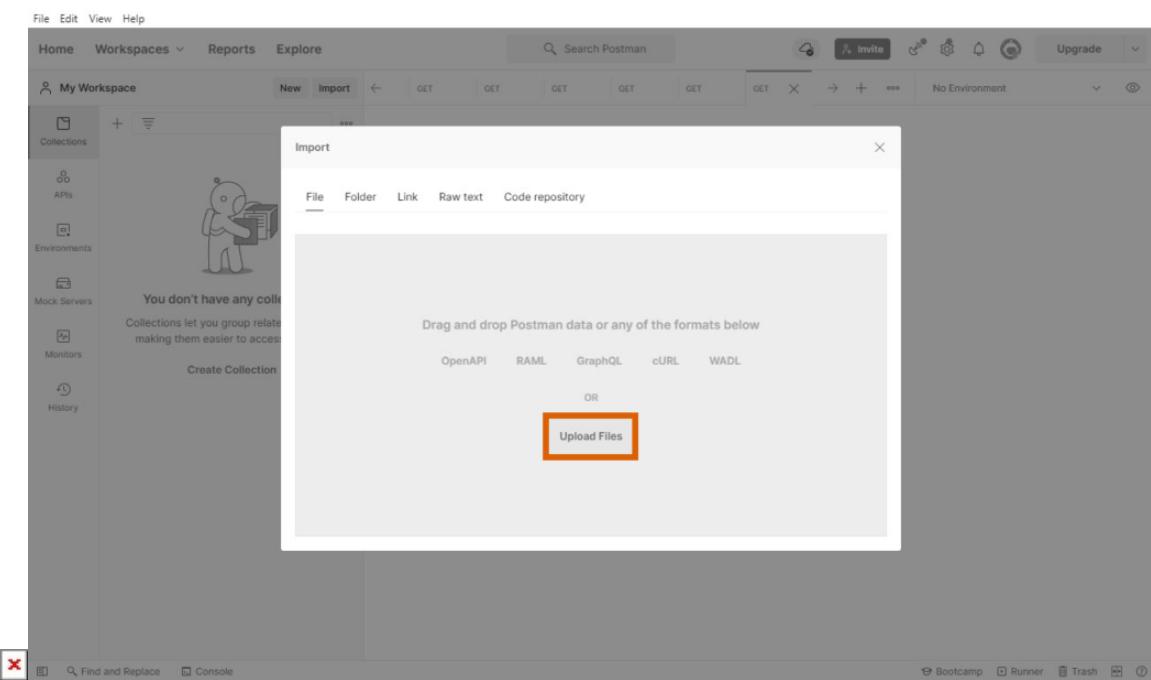

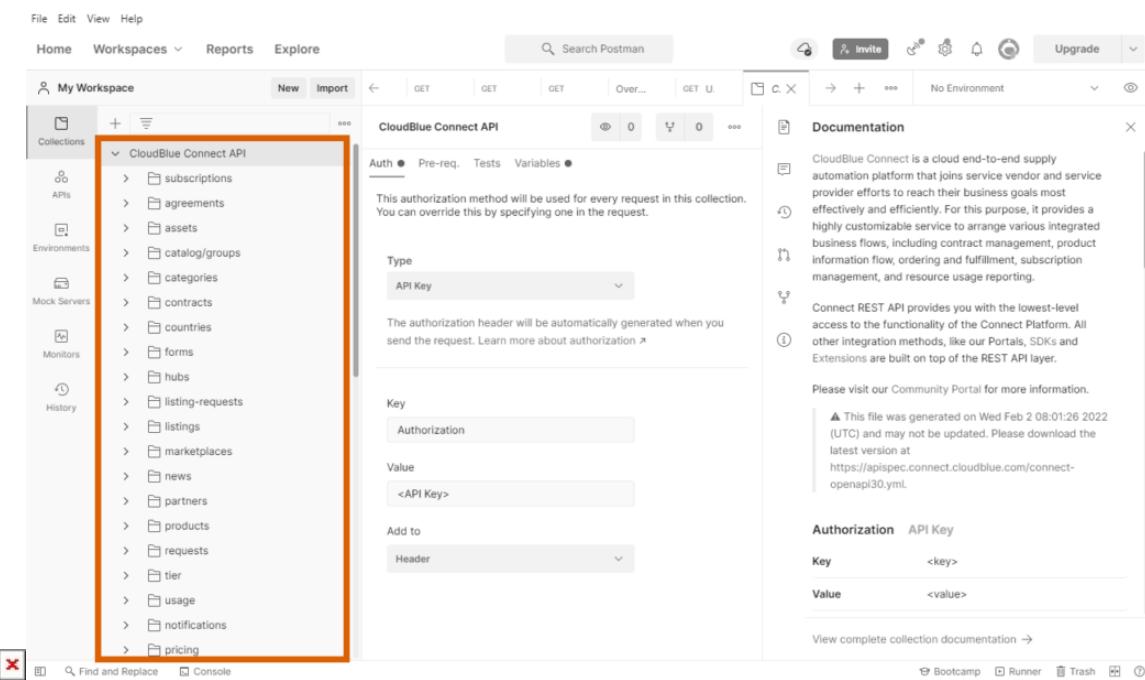

1. Access your workspace and click the **Import** button.
2. Click the **Upload Files** button and select your downloaded API specification file
3. Once your file is uploaded, click the **Import** button to confirm this operation.

Therefore, the API specification will be successfully imported to Postman. Note that it is also required to paste your *API Key/Handle* and *API endpoint* to your generated collection by following the steps below.

Collection Configuration

Once the API specification is added successfully, access the *Authorization* and *Variables* options by clicking on your collection from your Postman workspace.

Authorization Settings

First of all, proceed to the **Authorization** tab and configure the authorization method as follows:



File Edit View Help

Home Workspaces Reports Explore

My Workspace

CloudBlue Connect API

Authorization ● Pre-request Script Tests Variables ●

This authorization method will be used for every request in this collection. You can override this by specifying one in the request.

Type API Key

The authorization header will be automatically generated when you send the request.
Learn more about authorization ↗

Key Authorization

Value ApiKey SU-555-1234-567...

Add to Header

Find and Replace Console

Bootcamp Runner Trash

File Edit View Help

Home Workspaces Reports Explore

My Workspace

CloudBlue Connect API

Authorization ● Pre-request Script Tests Variables ●

This authorization method will be used for every request in this collection. You can override this by specifying one in the request.

Type API Key

The authorization header will be automatically generated when you send the request.
Learn more about authorization ↗

Key Authorization

Value ApiKey SU-555-1234-567...

Add to Header

Save Share

Find and Replace Console

Bootcamp Runner Trash


- **Type:** Select *API Key* in this field.
- **Key:** Choose *Authorization*.
- **Value:** Paste your *API Key/ Handle* value that is copied from the CloudBlue Connect platform
- **Add to:** Select *Header*.

Click the **Save** button to save your authorization method configuration.



Variables Settings

Switch to the **Variables** tab and make sure that the following variable and required values are configured correctly:

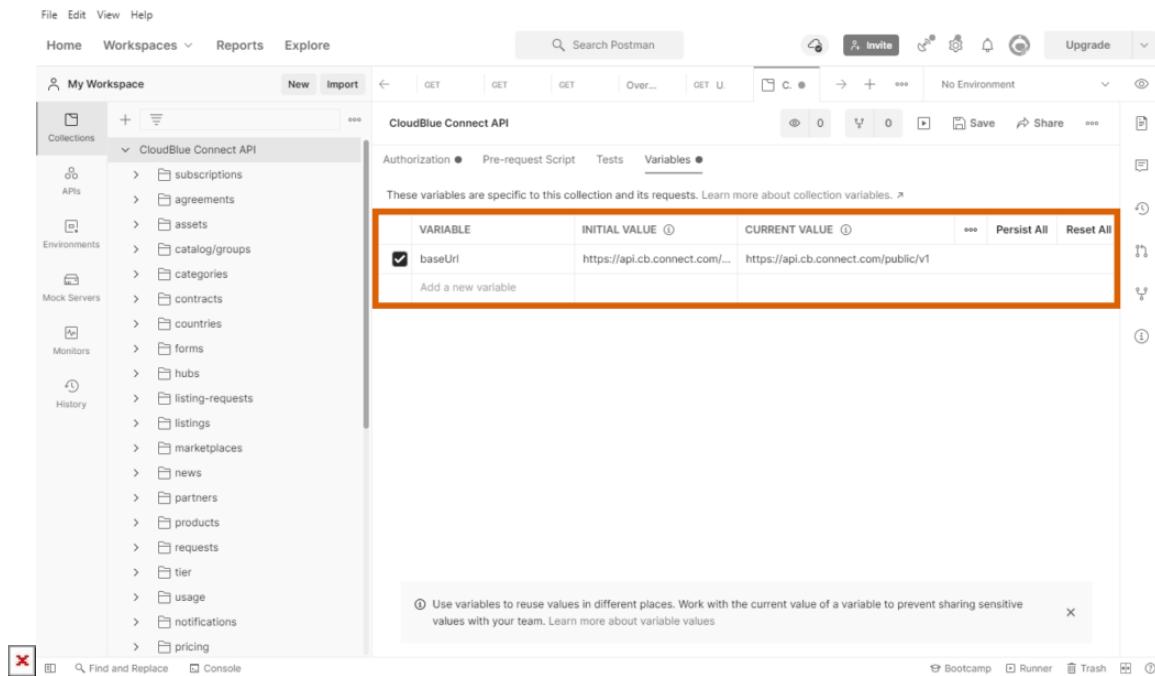

File Edit View Help

Home Workspaces Reports Explore

CloudBlue Connect API


Authorization Pre-request Script Tests Variables

These variables are specific to this collection and its requests. Learn more about collection variables.

VARIABLE	INITIAL VALUE	CURRENT VALUE		Persist All	Reset All
<input checked="" type="checkbox"/> baseUrl	https://api.cb.connect.com/...	https://api.cb.connect.com/public/v1			
Add a new variable					

Use variables to reuse values in different places. Work with the current value of a variable to prevent sharing sensitive values with your team. Learn more about variable values

Bootcamp Runner Trash

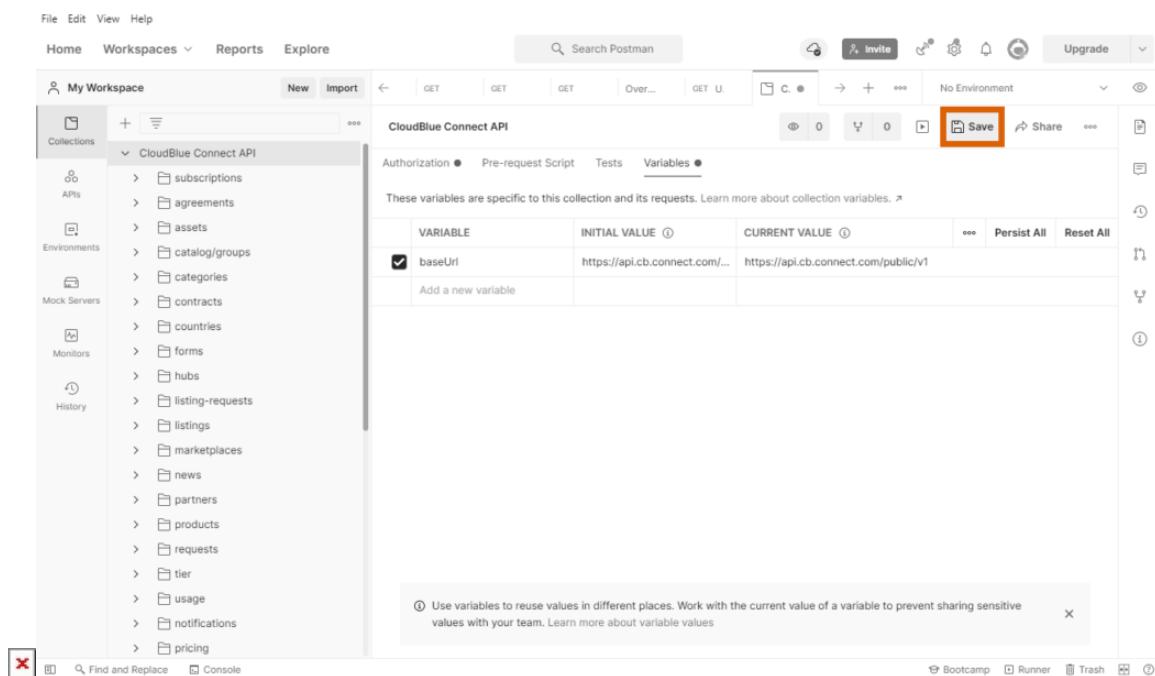

File Edit View Help

Home Workspaces Reports Explore

CloudBlue Connect API

Authorization Pre-request Script Tests Variables

These variables are specific to this collection and its requests. Learn more about collection variables.

VARIABLE	INITIAL VALUE	CURRENT VALUE		Persist All	Reset All
<input checked="" type="checkbox"/> baseUrl	https://api.cb.connect.com/...	https://api.cb.connect.com/public/v1			
Add a new variable					

Use variables to reuse values in different places. Work with the current value of a variable to prevent sharing sensitive values with your team. Learn more about variable values

Bootcamp Runner Trash

- **Variable:** The table should have a variable that is called *baseUrl*.



- **Initial value:** Shared with your team when you share your variable in a collection, environment and globals. This value may represent your copied *API endpoint*.
- **Current value:** Used while sending a request and never synced with Postman servers. If this value is empty, the client automatically uses the initial value (may also contain your *API endpoint*).

Click the **Save** button to save your changes. Thus, you can test out your configuration and start working the Connect API via the Postman client.

Make a Sample Call

Test your configuration and ensure the Postman client works correctly by making a sample call.


For example, access the agreement section from your added collection and open the *GET: dp Agreements- list Agreements* call to access a list of your agreements objects on the CloudBlue Connect platform:

The screenshot shows the Postman interface with the following details:

- File Edit View Help**
- Home Workspaces** (selected)
- Reports Explore**
- Search Postman**
- Upgrade**
- My Workspace** (selected)
- Collections**: CloudBlue Connect API (selected), sub-items: subscriptions, agreements (selected), (agreement id), (id)
- APIs**: GET dp agreement list list Agree...
- Environments**: Untitled Example
- Mock Servers**: POST dp agreement list create A...
- Monitors**: assets, catalog/groups, categories, contracts, countries, forms, hubs, listing-requests, listings, marketplaces, news, (id), (post pk)/versions
- History**: (empty)
- Send** button
- Params**: limit: 99886600, offset: 99886600, active: false, created: 2008-05-08T21:36:34.881Z, forms.id: ut reprehenderit magna in labore, forms_type: item, id: ut reprehenderit magna in labore
- Authorization**, **Headers** (7), **Body**, **Pre-request Script**, **Tests**, **Settings**
- Query Params** table (highlighted with a red box):

KEY	VALUE	DESCRIPTION	Bulk Edit
limit	99886600	Number of results to return per page.	
offset	99886600	The initial index from which to return the re...	
active	false	**Filter for: active**	
created	2008-05-08T21:36:34.881Z	**Filter for: created**	
forms.id	ut reprehenderit magna in labore	**Filter for: forms.id**	
forms_type	item	**Filter for: forms_type**	
<input checked="" type="checkbox"/> id	ut reprehenderit magna in labore	**Filter for: id**	

- Response**: Click Send to get a response (with an illustration of an astronaut)
- Bottom navigation**: Find and Replace, Console, Bootcamp, Runner, Trash

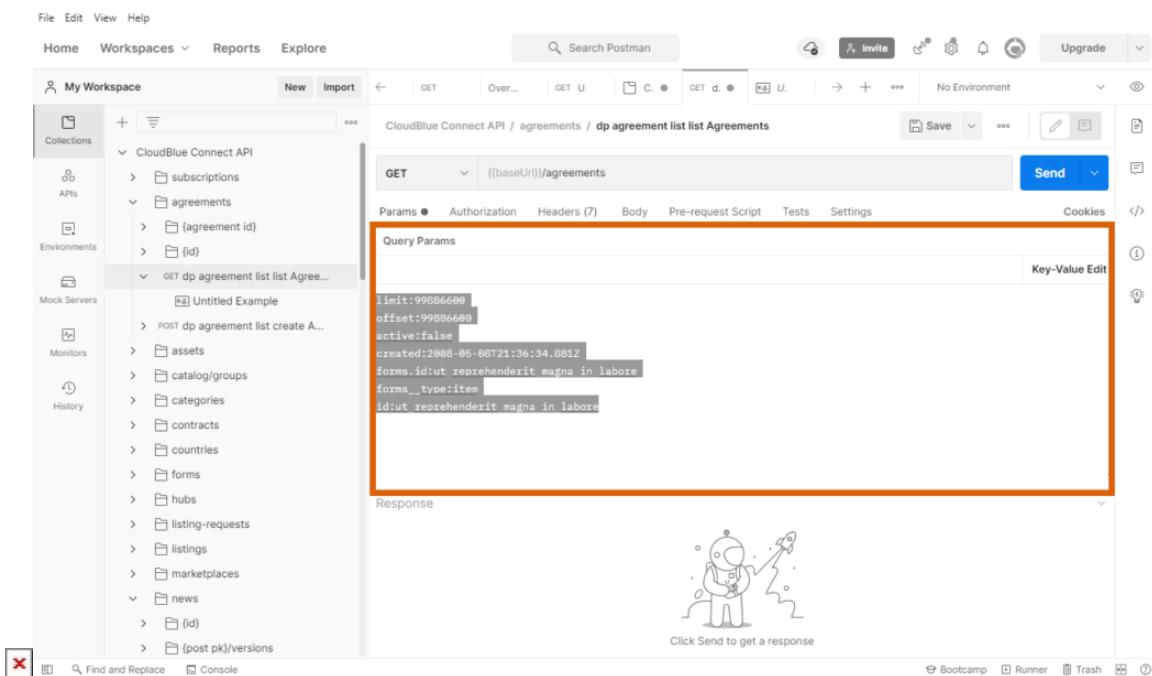

File Edit View Help

Home Workspaces  Reports Explore

Search Postman

GET  Over...  GET U.  C.  GET d.  U.  No Environment  Upgrade 

My Workspace

Collections  +                         <img alt="Import icon" data-bbox="1117



window.

In case more information on the Postman functionality is required, please refer to the Getting started with Postman documentation.