



<https://cloudblue.com>

Documentation Modules DevOps

# DevOps Interface



This article has been generated from the online version of the documentation and might be out of date. Please, make sure to always refer to the online version of the documentation for the up-to-date information.

Auto-generated at January 13, 2026




The DevOps module on the CloudBlue Connect platform is used to add and manage your extensions. This module is also used to monitor your deployed environments, manage your environment variable and settings, and accessing your logs and events.

Follow the instructions below to add your extension object and perform various operations with your extension on the Connect platform.

## Adding Extensions

Before starting to deploy and configure with your extension, it is required to define an object for your extension on the Connect platform. Start creating a new extension by navigating to the *DevOps* module and clicking **Add Extension**.

The system provides the following configuration options that allow defining your extension project:

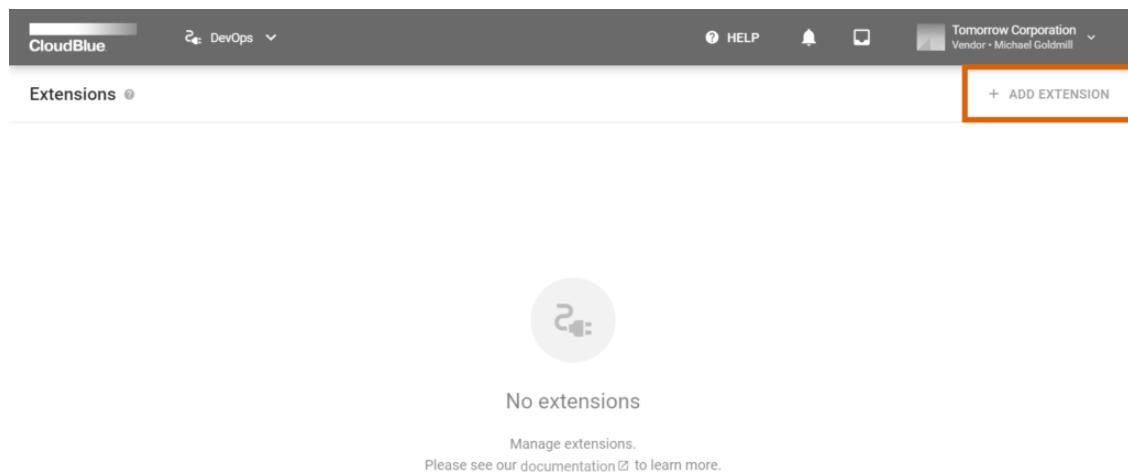

CloudBlue  Front Street Inc  Vendor · Robert Balboa

Extensions    + ADD EXTENSION

**Add Extension**

Name \*  
Front Street Fulfillment Automation Extension

Upload an image  
  
The image will be resized to 64x64 pixels.

Type \*  
Fulfillment Automation

See our documentation  for more

Products  + ADD

 Champion Product  
PRD-107-418-735

CloudBlue  Front Street Inc  Vendor · Robert Balboa

Extensions    + ADD EXTENSION

**Add Extension**

Name \*  
Front Street Multi-Account Extension

Upload an image  
  
The image will be resized to 64x64 pixels.


Type \*  
Multi-Account Installation

See our documentation  for more

Package ID \*  
frontstreet.package.com

Globally unique identifier to be assigned to this extension

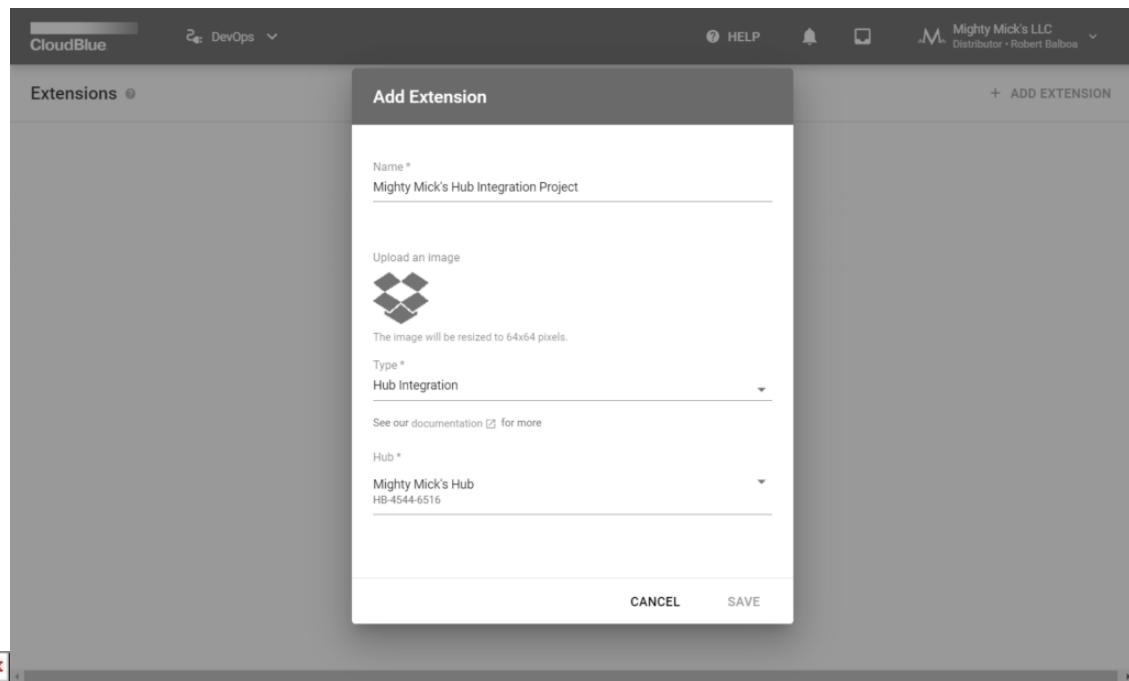

1. **Name:** Specify a name for your new extension object.
2. **Upload an image:** Provide an image for your extension project if necessary.
3. **Type:** The system requires to select one of the following extension types:
  - *Multi-Account Installation:* This extension type is used to create an extension to streamline or automate various business scenarios. Multi-accounts extensions will be available for your business partners and other organizations with your provided invites. The system also allows publishing such extensions for the public access.
  - *Commerce Transformations:* Use this type to create an extension for working with commerce systems. The commerce transformations type provides the same functionality as multi-account installation extensions.
  - *Fulfillment Automation:* This type is used to create an extension for automating the Fulfillment Request approvals. The system enables to specify products that will work with your extension. Note that this extension type is available only for Vendor accounts.
  - *Hub Integration:* Select this type to establish integration with your registered Hub on the Connect platform. The system requires to specify your package identifier in the following format: `cloudblue.connect.package`. This extension type is available only for Distributors and Resellers.

Click the **Save** button to finalize the initial setup for your extension object on the Connect platform. Continue configuring your extension as it is described in the Extension Project documentation.

## Service Details


Once a new extension object is added to the DevOps module, the system allows accessing the **Extension Details** screen. It provides detailed information on your deployed service and enables to perform various operations with your extension.



## Multi-Account Extension Management


If the *multi-account* extension type is selected and your service is deployed, the system allows managing each installation, generating invitations for your business partners, and perform other actions. For more information on the operations that are exclusive to this extension type, refer to the Multi-Account Service documentation.

The following describes the provided graphical user interface and showcases essential operations within the Extension Details screen:

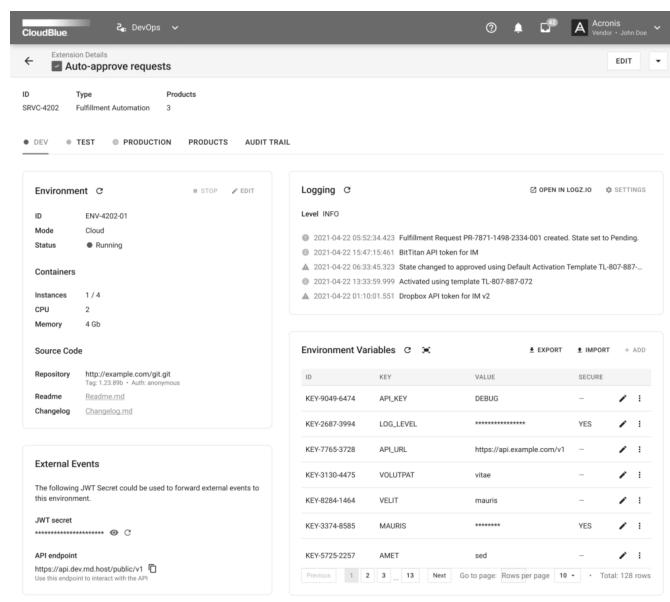

The screenshot displays the 'Extension Details' page for a service named 'SRVC-4202'. The top navigation bar includes 'CloudBlue', 'DevOps', and a user profile for 'Acronis Vendor - John Doe'. The main content area is divided into several sections:

- Environment:** Shows the service ID (ENV-4202-01), mode (Cloud), and status (Running). It also lists 'Containers' (1 / 4 instances, 2 CPU, 4 Gb memory), 'Source Code' (repository URL: <http://example.com/git.git>, tag: 1.23.99, anonymous access), and 'External Events' (JWT secret and API endpoint: <https://api.dev.md.host/public/v1>).
- Logging:** A log viewer showing recent events, including Fulfillment Request creation, state changes, and activation logs.
- Environment Variables:** A table listing environment variables with columns for ID, KEY, VALUE, and SECURE status. Examples include `API_KEY` (value: `DEBUG`, secure: yes), `LOG_LEVEL` (value: `*****`, secure: yes), and `API_URL` (value: `https://api.example.com/v1`, secure: yes).

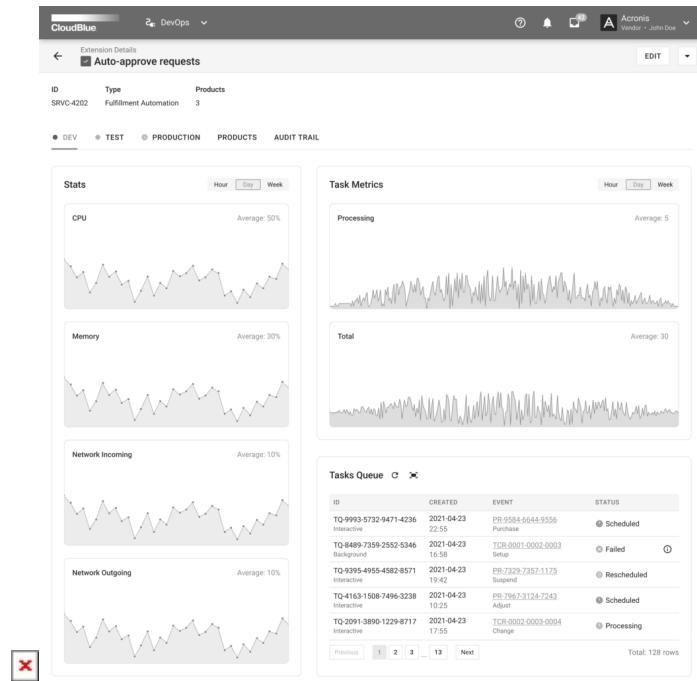

Extension Details

Auto-approve requests

ID: SRVC-4202 Type: Fulfillment Automation Products: 3


DEV TEST PRODUCTION PRODUCTS AUDIT TRAIL

Stats

Task Metrics

Tasks Queue

Previous 1 2 3 ... 13 Next Total: 128 rows

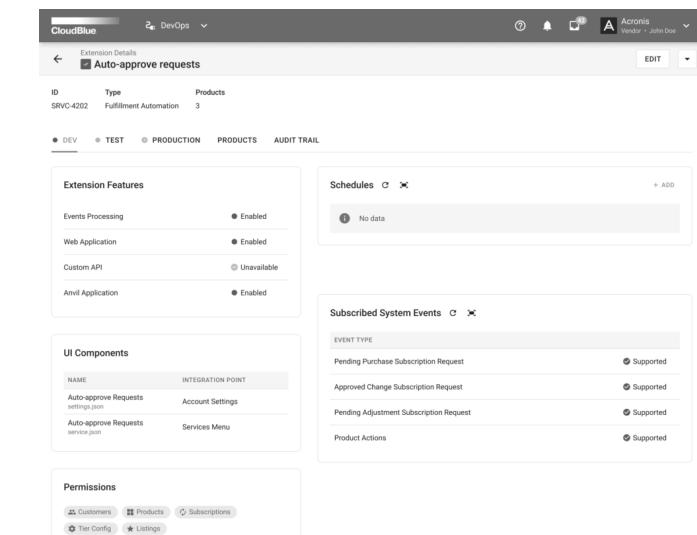

Extension Details

Auto-approve requests

ID: SRVC-4202 Type: Fulfillment Automation Products: 3

DEV TEST PRODUCTION PRODUCTS AUDIT TRAIL

Extension Features

UI Components

Permissions

Subscribed System Events

In case it is required to change the name or image of your extension, click the **Edit** button at the top-right corner of the screen. In addition, the vertical ellipsis (⋮) button allows deleting extension on the Connect platform.

## Removing Services and Switching Environments

Note that it is possible to delete an extension only in case all of your environments are stopped or disconnected. The system also allows to switch your environment mode (i.e., switching your local environment to the Cloud mode and vice versa) only in case this environment is stopped, uninitialized or disconnected.

The Extension Details screen enables Connect users to access Developer (*Dev*), Production (*Prod*) and Staging (*Test*) environments via corresponding tabs on the user interface. The system provides the following sections within each tab:

- **Environment:** This section displays your environment mode (*Local* or *Cloud*) and its status (*Deploying*, *Disconnected*, *Connected*, *Running*, *Stopped*, or *Errored*). Enable or disable your environment by using corresponding buttons on the user interface. Click the *Edit* button to configure your environment as described below. In case the Cloud mode is connected, this section also displays your deployed container instances, CPUs and memory. Furthermore, this section also displays your specified Git repository and provides links to your *readme* and *changelog* files.
- **Local Access:** This section is available in case the *Local* mode is selected. This section provides an *Environment ID* that is used to process your environment queue locally. Copy the link by using the corresponding icon from this section.
- **External Events:** Provides a *JWT secret* that is required to forward external events to your selected environment. Show/hide or copy your *JWT secret* by using corresponding icons within this section.
- **Environment Variables:** Specify your environment variables with this section. Click the *Add* button to define a new value for your required variable. In addition, import or export your variables list by using corresponding buttons in this section. Click on the *edit icon* to change a variable from the list. Delete your variable by clicking on the vertical ellipsis (⋮) icon.
- **Tasks Queue:** Use this section to examine tasks queue for your environment. For example, this queue may include pending fulfillment requests or tier configuration request that should be processed by Vendors systems. Note that in addition to *processing* tasks queue instances, the DevOps module allows you to *schedule* and *reschedule* your tasks.
- **Permissions:** Provides required permissions to access associated modules on the CloudBlue Connect platform. Namely, the system displays modules that can be accessed by your extension.

Once your extension is deployed successfully, the Extension Details screen also displays the following information within your *connected* or *running* environment tabs:


- **Stats:** This section provides resource monitors that shows your *CPU*, *Memory* and *Network* utilization. Switch between your *hour*, *day* and *week* statistics by using the corresponding buttons in this section.
- **Events:** Use this section to review event logs of your selected environments in the *Cloud* mode. Note that the system uses the logz.io extension with a Kibana UI to generate your event logs, create alerts, and more.
- **UI Components:** Displays associated user interface components and their integration point. For instance, this may include auto-approve request components for your fulfillment automation extension.
- **Subscribed System Events:** Provides system events on the Connect platform. Specifically, this section displays event types and whether each type is supported by your extension.
- **Extension Features:** Review features that are enabled for your extension. The system specifies whether your extension includes *event processing*, *web application*, *custom API* methods, and the Anvil.Works application functionality.
- **Custom API Methods:** This represents a list of custom API methods that are provided by your extensions and that can be used once the extension is installed. It also includes an endpoint to interact with the API.

- **Schedules:** Used to schedule the processing of your extension tasks. Detailed information on how to configure and manage your schedules is available under the corresponding heading in this article.


## Environment Configuration

The system allows switching your environment between the *Local* and *Cloud* modes in case your environment is not running or connected.

Access the **Extension Details** screen and click the **Edit** button next to your environment mode and status information to start configuring your selected environment.

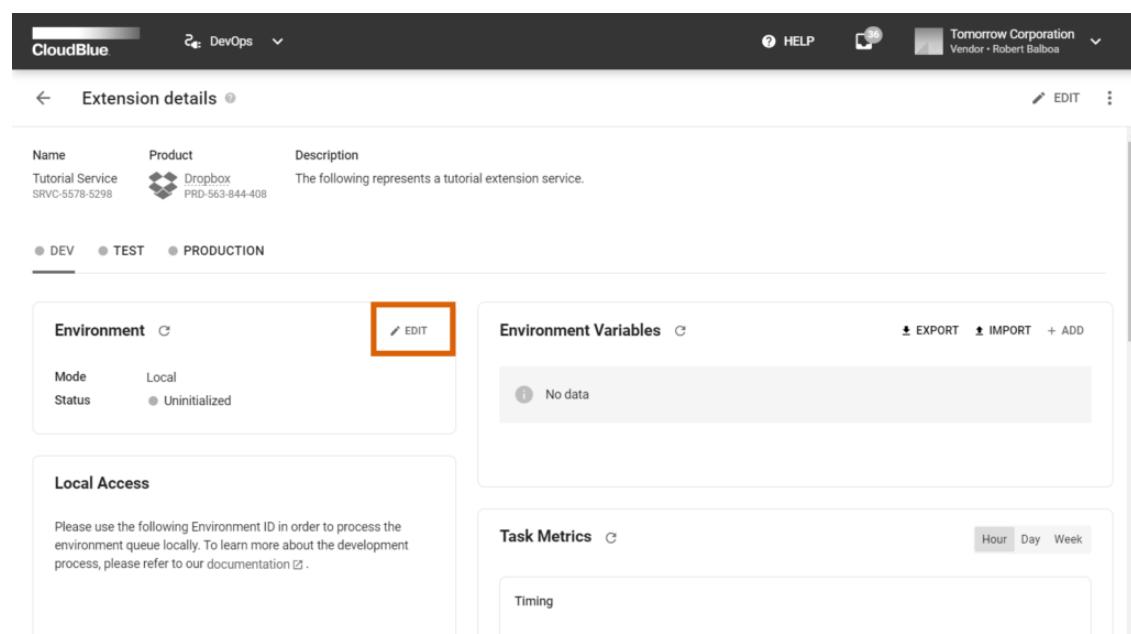

The screenshot shows the 'Extension details' screen for a 'Tutorial Service' extension. The environment is currently set to 'Local' and 'Uninitialized'. The 'Edit' button for the environment mode is highlighted with a red box. Other sections visible include 'Environment Variables', 'Task Metrics', and 'Local Access'.

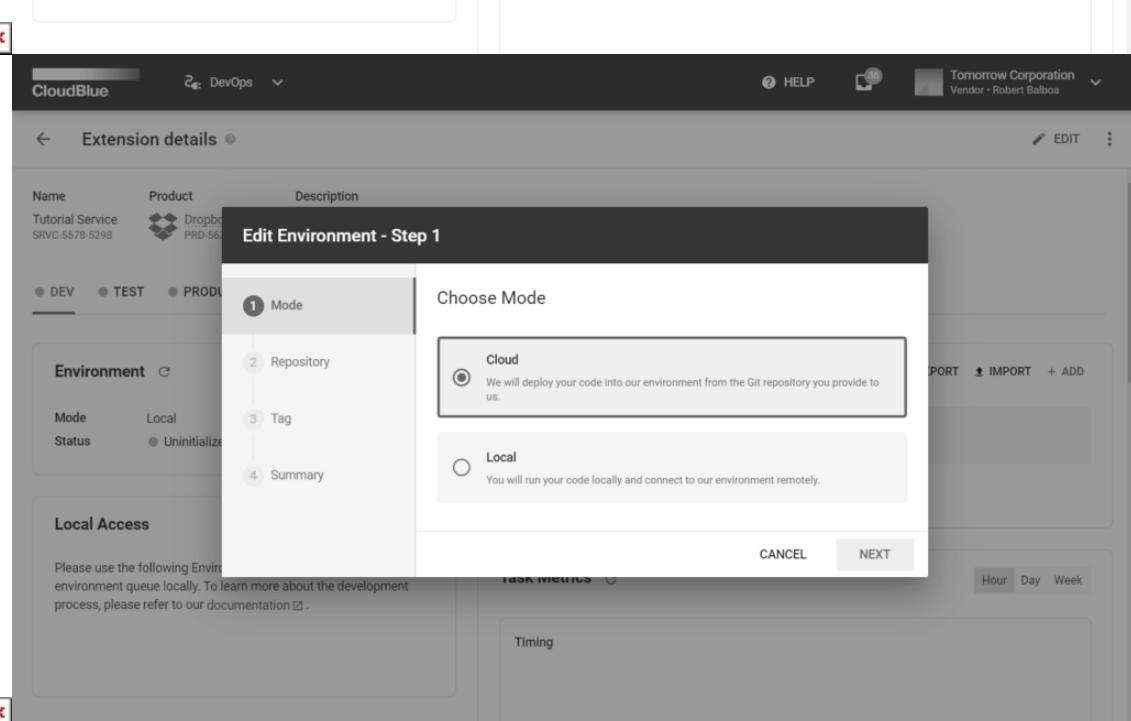The screenshot shows the 'Edit Environment - Step 1' modal. The 'Mode' step is selected, showing two options: 'Cloud' and 'Local'. The 'Cloud' option is selected. The modal has 'CANCEL' and 'NEXT' buttons at the bottom. The background shows the same 'Extension details' screen as the previous screenshot.

  DevOps   Tomorrow Corporation  Vendor - Robert Balboa

### Edit Environment - Step 2

Extension details

Name	Product
Tutorial Service	Dropbox
SRVC-5578-5298	PRD-566

Mode:  Mode  Repository  Tag  Summary

Environment:  Local  Uninitialized

Local Access

Please use the following Environment queue locally. To process, please refer to our documentation.

Git Repository URL \*  
https://github.com/tomorrowllc/connect-extension

Requires authorization   
Username: rbalboa@fstreet.com  
Password / Personal Access Token:   
\*\*\*\*\*

CANCEL BACK NEXT

  DevOps   Tomorrow Corporation  Vendor - Robert Balboa

### Edit Environment - Step 3

Extension details

Name	Product
Tutorial Service	Dropbox
SRVC-5578-5298	PRD-566

Mode:  Mode  Repository  Tag  Summary

Environment:  Local  Uninitialized

Local Access

Please use the following Environment queue locally. To process, please refer to our documentation.

Git Repository URL \*  
https://github.com/tomorrowllc/connect-extension


Requires authorization   
Username: rbalboa@fstreet.com  
Password / Personal Access Token:   
\*\*\*\*\*

Select repository tag

Search for tag

22.11	<input checked="" type="radio"/>
22.10	<input type="radio"/>
22.9	<input type="radio"/>
22.8	<input type="radio"/>
22.7	<input type="radio"/>
22.6	<input type="radio"/>
22.5	<input type="radio"/>
22.4	<input type="radio"/>
22.3	<input type="radio"/>

CANCEL BACK SAVE

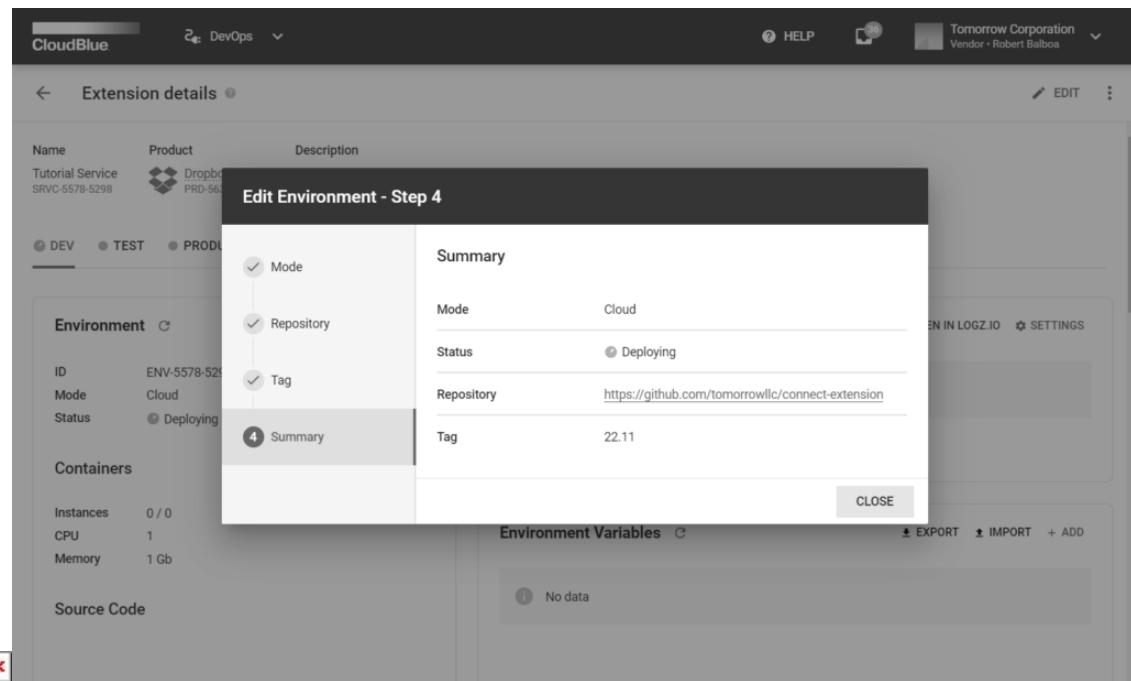


Therefore, the system provides a wizard that helps users with the following configuration:

1. **Mode:** Select the *Cloud* mode to deploy your extension on the Connect-managed infrastructure. Choose the *Local* mode to deploy your environment on your custom infrastructure.
2. **Repository:** Specify your Cloud repository and authorization details in the following form. Note that this wizard step is available only in case the *Cloud* mode is selected:
  - **Git Repository URL:** Provide a link to your Git repository.
  - **Requires authorization:** Check this checkbox in case your repository requires authorization.
  - **Username:** Enter your Git username if authorization is required.
  - **Password:** Specify your password in case authorization is required.
3. **Tag:** Specify your repository tag in the following form. This wizard step is available only in case the *Cloud* mode is selected.

As a result, the system provides an environment configuration summary. Make sure that your provided summary is correct and click the **Close** button.

## Environment ID Specification

In case your service should be deployed locally, the system provides access details that are unique for each of your local environments and that are used to bootstrap your extension project. Specifically, it is required to copy your *Environment ID* and enter this identifier while providing environment configuration for your extension. Access your instance identifier as described below:

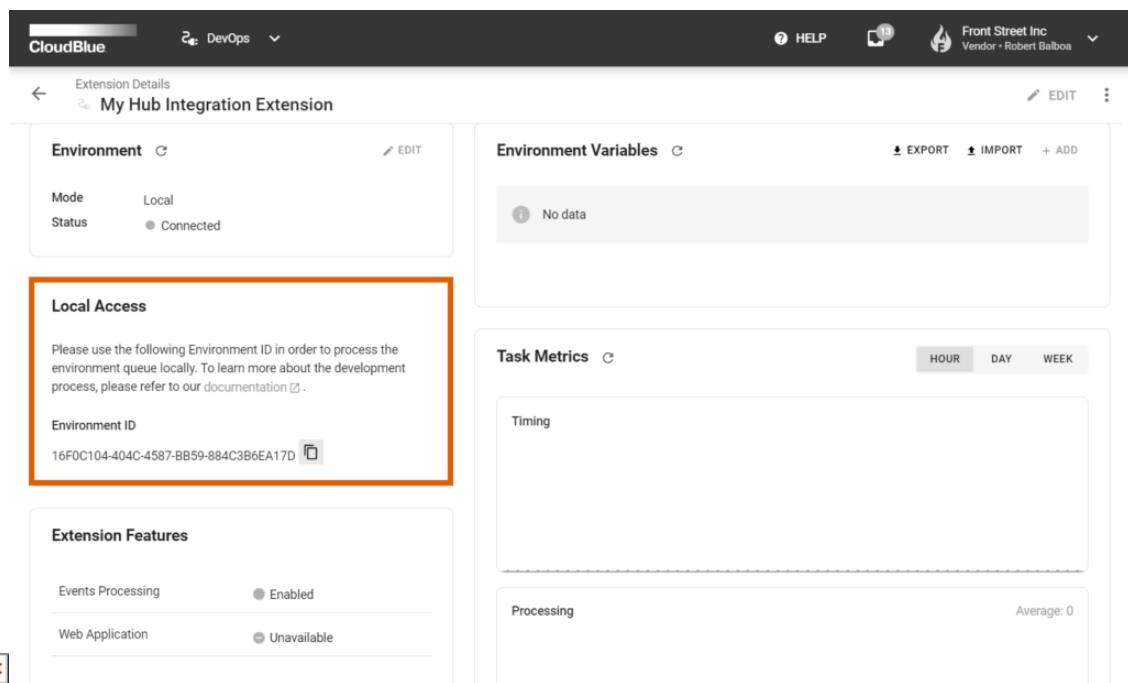

Local Access

Please use the following Environment ID in order to process the environment queue locally. To learn more about the development process, please refer to our documentation [documentation](#).

Environment ID

16F0C104-404C-4587-BB59-884C3B6EA17D 



Extension project bootstrap - 13 of 22

1. Introduction  
2. Project: name  
3. Project: root  
4. Project: description  
5. Project: version  
6. Project: author  
7. Project: license  
8. Project: package  
9. Project: asyncio  
10. Project: CI  
11. Config API hostname  
12. Config API key  
13. Config: environment ID  
14. Extension: Extension type  
15. Extension: Audience  
16. Extension: Features  
17. Extension: Events type  
18. Extension: WebApp  
19. Extension: Background events  
20. Extension: Interactive events  
21. Examples: variables  
22. Summary

Enter the DevOps environment identifier to which your Extension will connect:  
It can be found in the DevOps module of Connect within the Local Access widget.  
See: [https://connect.cloudblue.com/community/modules/devops/user-interface/#Service\\_Details](https://connect.cloudblue.com/community/modules/devops/user-interface/#Service_Details)

16F0C104-404C-4587-BB59-884C3B6EA17D

< Next > < Back > < Cancel >

1. Navigate to the environment that is necessary for bootstrapping extension project. Locate the required identifier under **Local Access** details. Use the provided button to copy your identifier.
2. Once you start bootstrapping your extension project, paste your identifier on the *Config: Environment ID* step.

Consequently, the Connect CLI will use your provided identifier for the subsequent configuration. For more information on the extension project creation, refer to the Extension Project documentation.




## Environment Variables


Environment variables are essential for working with your extension. Such variables directly affect the way running processes will behave on your configured environment. Note that environment variables store parameter keys and their values, which then served as input to your provided service. Follow the guidelines below to add, import, and export your environment variables.

### Adding Variables


Access the **Extension Details** screen and click the **Add** button under *Environment Variables* to define a new value for your environment variable:

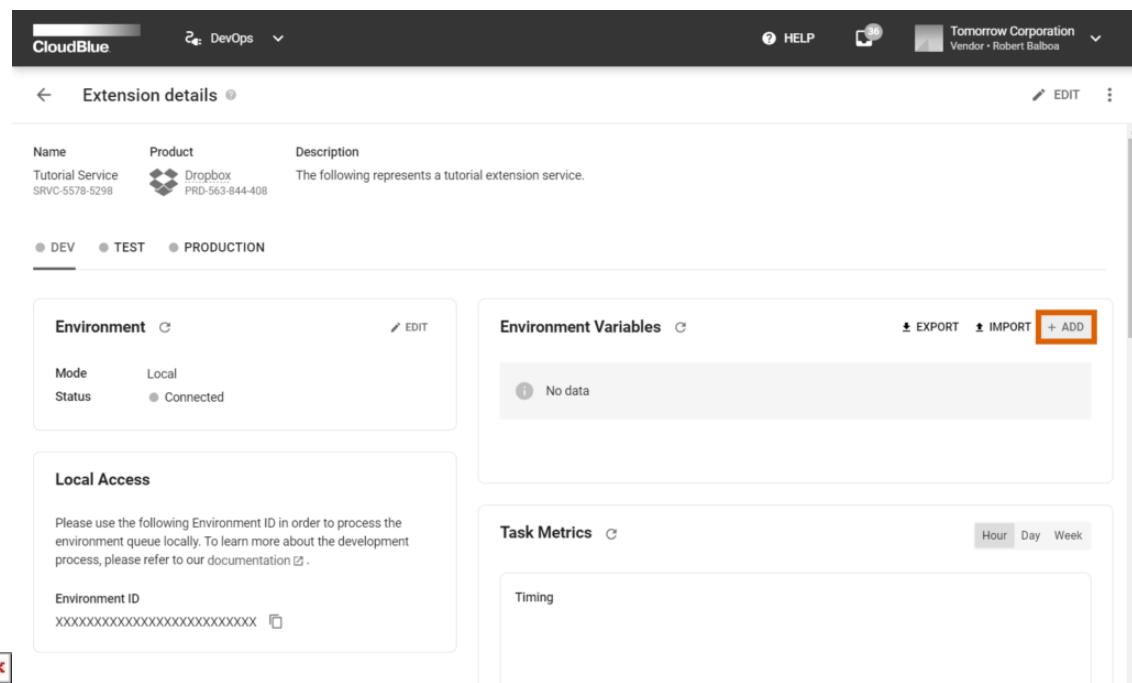

The screenshot shows the 'Extension details' screen in the DevOps interface. At the top, there are tabs for 'DEV', 'TEST', and 'PRODUCTION'. Below these tabs, there are four main sections: 'Environment', 'Local Access', 'Environment Variables', and 'Task Metrics'. The 'Environment' section shows a 'Mode' of 'Local' and a 'Status' of 'Connected'. The 'Local Access' section contains a note about using an Environment ID for local processing and provides an 'Environment ID' field with the value 'XXXXXXXXXXXXXXXXXXXXXX'. The 'Task Metrics' section shows a 'Timing' chart. The 'Environment Variables' section is the focus, featuring a table with columns 'Name', 'Product', and 'Description'. A single row is shown: 'Tutorial Service' (Product: 'Dropbox') with the description 'The following represents a tutorial extension service.' Below this table, there are buttons for 'EXPORT', 'IMPORT', and '+ ADD'. The '+ ADD' button is highlighted with a red box. The top right of the screen shows the vendor name 'Tomorrow Corporation' and the user 'Robert Balboa'.

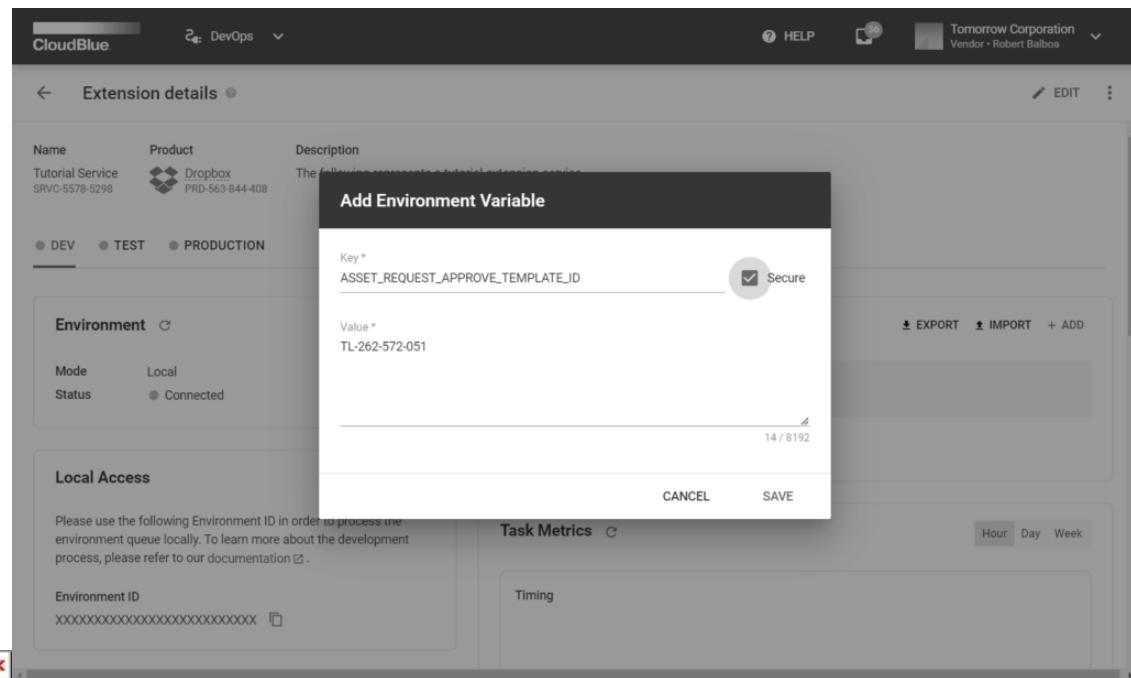

The screenshot shows the 'Extension details' page for a 'Tutorial Service'. A modal dialog box is open, titled 'Add Environment Variable'. Inside the dialog, the 'Key' field is set to 'ASSET\_REQUEST\_APPROVE\_TEMPLATE\_ID' and the 'Value' field is set to 'TL-262-572-051'. A checkbox labeled 'Secure' is checked. The background of the page shows the 'Environment' and 'Local Access' sections, and a table of 'Environment Variables' with one row highlighted.

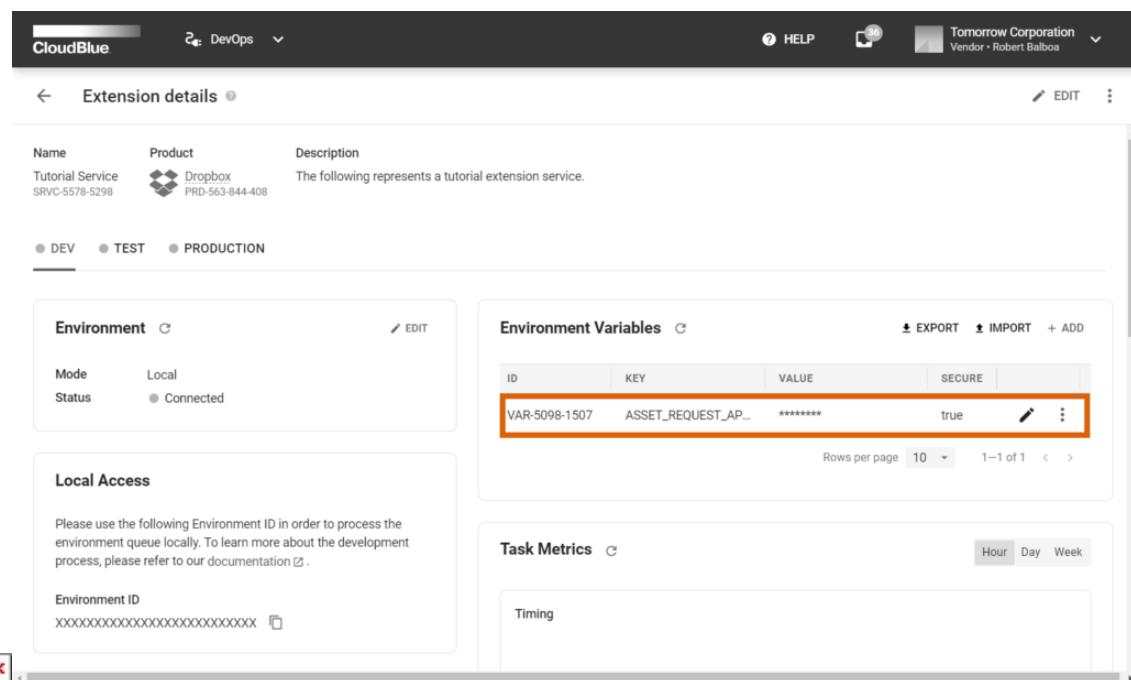

The screenshot shows the 'Extension details' page for a 'Tutorial Service'. The 'Environment Variables' table is displayed, showing a single row with the following data:

ID	KEY	VALUE	SECURE
VAR-5098-1507	ASSET_REQUEST_AP...	*****	true

The 'Secure' column for this row is checked. The background shows the 'Environment' and 'Local Access' sections, and a table of 'Task Metrics'.

1. Provide your environment variable key (e.g., `ASSET_REQUEST_APPROVE_TEMPLATE_ID`).
2. Specify a value for your new key (e.g., activation template value: `TL-262-572-051`).
3. In case the **Secured** checkbox is checked, the provided value will be encrypted. Thus, this value can be used only by your extension project.
4. Add your new variable by using the **Save** button.




Once your environment variable is added, the system allows managing your variables by clicking on the *edit* icon. Note that in case your variable is secured, the system only allows changing your specified value. Your variable can also be removed by using the additional (:) menu.


## Import Operation

The Connect platform allows importing your environment variables that are listed in the spreadsheet table. Create a XLSX file and name your sheet as **Data**. Next, enter your variable name in the first column. The second column should include your environment value. Furthermore, the third column must specify if your environment should be encrypted (yes) or not secured (no).

Note that the first row serves as the headers for your columns and thus the first row should contain the following text: **name**, **value** and **secure**. The images below provide an example of a filled spreadsheet file and illustrate the successful import operation to the Connect platform:

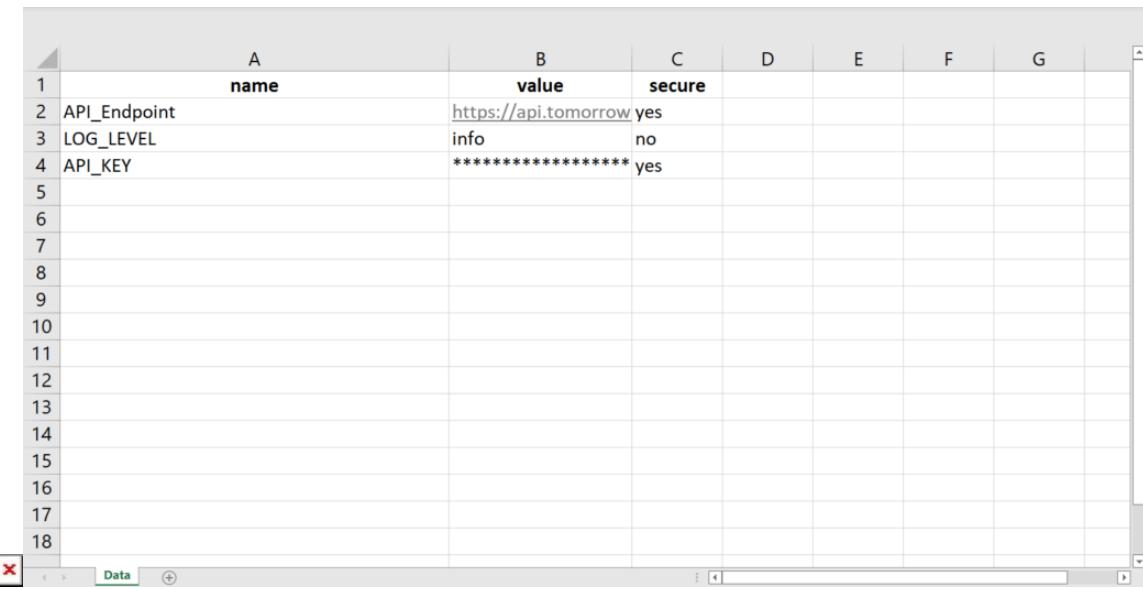

	A	B	C	D	E	F	G
1	name	value	secure				
2	API_Endpoint	https://api.tomorrow	yes				
3	LOG_LEVEL	info	no				
4	API_KEY	*****	yes				
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							

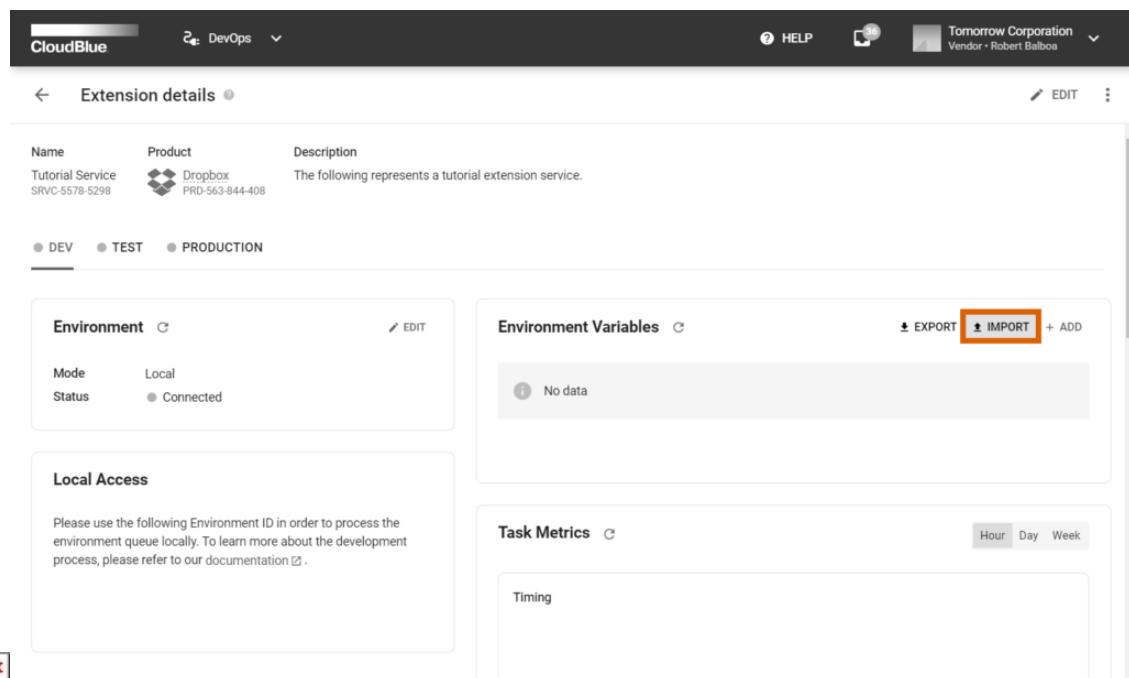

CloudBlue DevOps

Extension details

Name: Tutorial Service Product: Dropbox

Description: The following represents a tutorial extension service.

Mode: Local Status: Connected


Environment Variables: No data

Task Metrics: Timing

Local Access: Please use the following Environment ID in order to process the environment queue locally. To learn more about the development process, please refer to our documentation.

DEV TEST PRODUCTION

EXPORT IMPORT + ADD

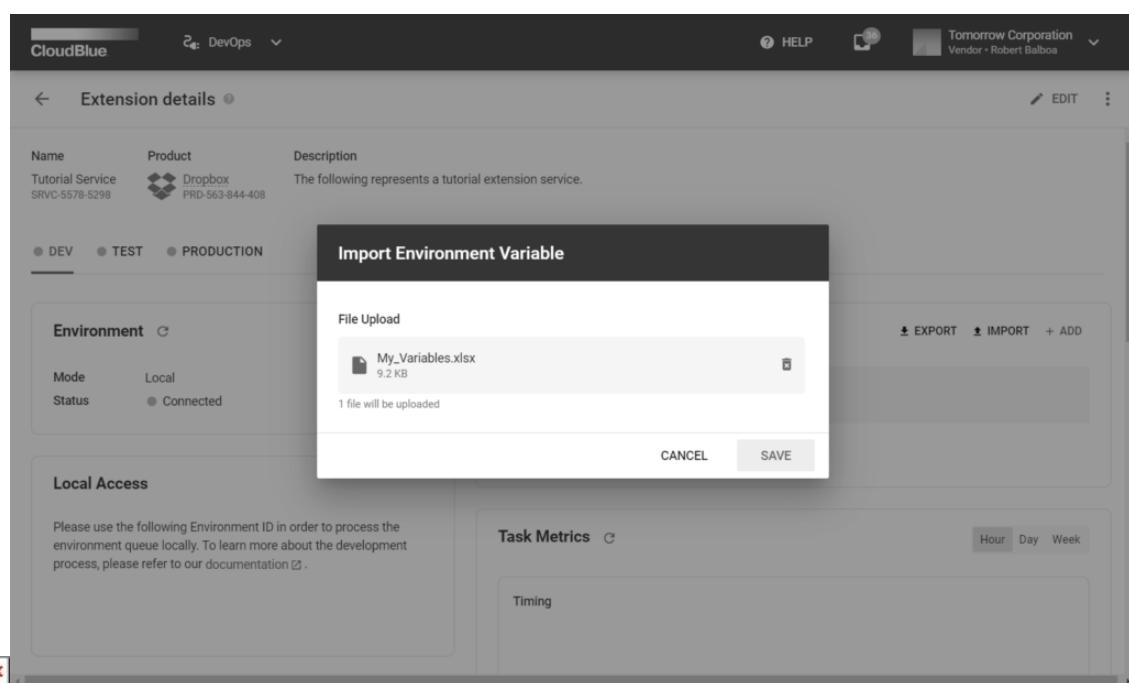

CloudBlue DevOps

Extension details

Name: Tutorial Service Product: Dropbox

Description: The following represents a tutorial extension service.

Mode: Local Status: Connected

Import Environment Variable


File Upload: My\_Variables.xlsx (9.2 KB)

Task Metrics: Timing

Local Access: Please use the following Environment ID in order to process the environment queue locally. To learn more about the development process, please refer to our documentation.

DEV TEST PRODUCTION

EXPORT IMPORT + ADD

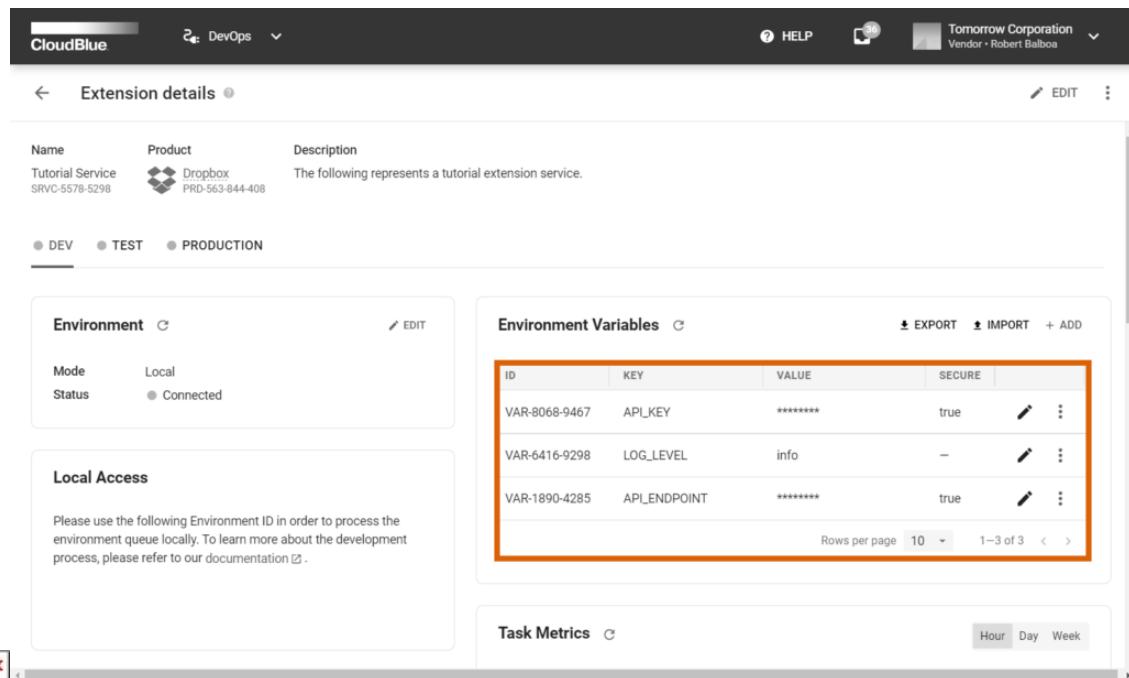

ID	KEY	VALUE	SECURE	EDIT	⋮
VAR-8068-9467	API_KEY	*****	true		
VAR-6416-9298	LOG_LEVEL	info	-		
VAR-1890-4285	API_ENDPOINT	*****	true		


Once your spreadsheet file is filled and ready for the import operation, access the **Extension Details** screen on Connect and click the **Import** button. Thereafter, browse your spreadsheet file or drag and drop this file to the following *File Upload* form.

In case the import operation is successful, click **Save** to finalize this operation. In case of an error, the system will provide detailed information on the issues with your spreadsheet file.

## Export Operation

The system also allows exporting your variables that are specified within your particular environment. Therefore, the export operation can be essential to transfer your environment variables from one environment to another or to copy your variables to another extension instance on Connect.

Click the **Import** button to initiate this operation. Therefore, the exported spreadsheet file will be available in your browser's download directory.

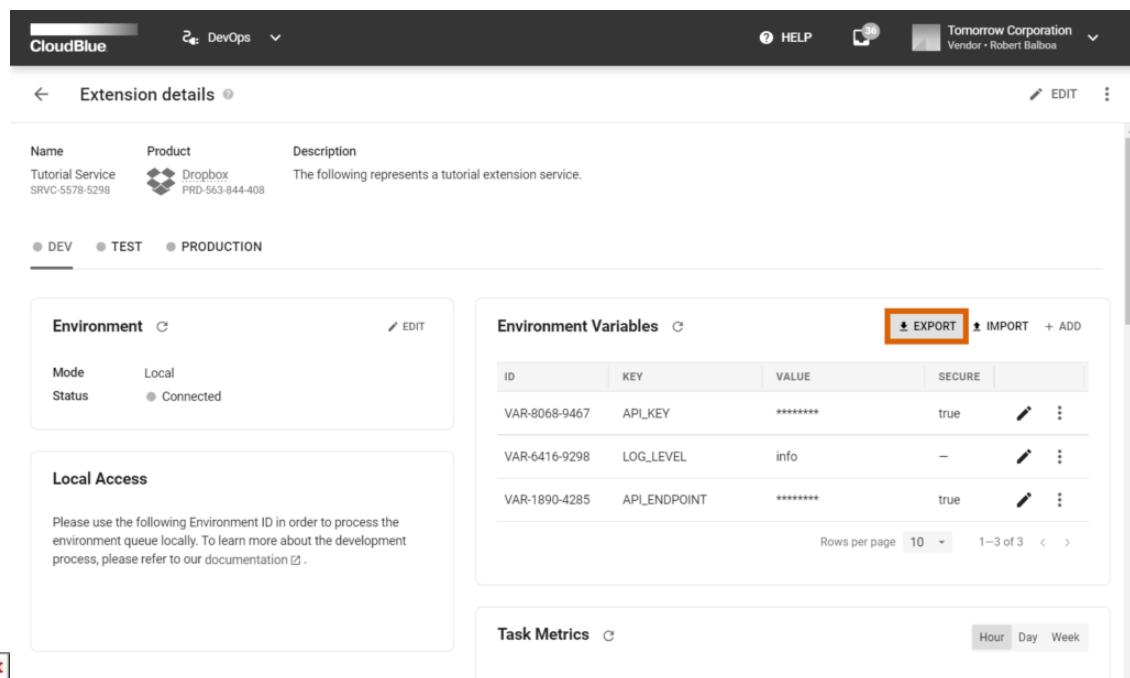

**Extension details**

**Name** Tutorial Service **Product** Dropbox **Description** The following represents a tutorial extension service.

**DEV** **TEST** **PRODUCTION**

**Environment**  **Local**  **Connected**


**Local Access**  
Please use the following Environment ID in order to process the environment queue locally. To learn more about the development process, please refer to our documentation .

**Environment Variables**   **+ ADD**

ID	KEY	VALUE	SECURE
VAR-8068-9467	API_KEY	*****	true
VAR-6416-9298	LOG_LEVEL	info	—
VAR-1890-4285	API_ENDPOINT	*****	true

Rows per page: 10 | 1–3 of 3 |  

**Task Metrics**   

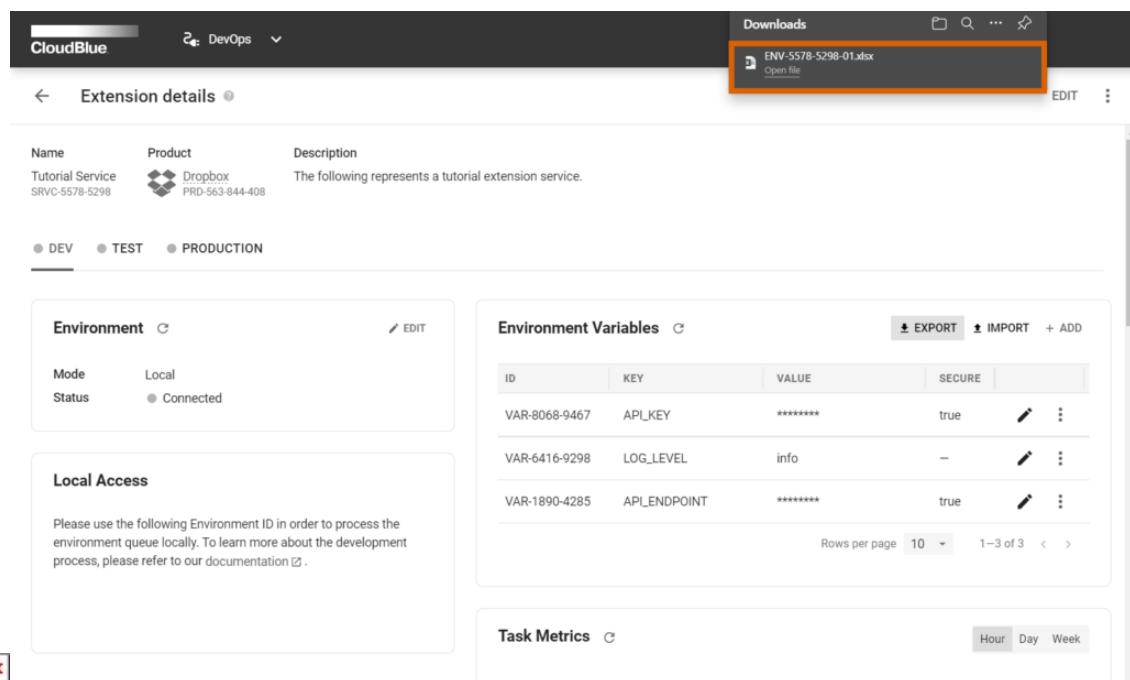

**Downloads**

**Extension details**

**Name** Tutorial Service **Product** Dropbox **Description** The following represents a tutorial extension service.

**DEV** **TEST** **PRODUCTION**

**Environment**  **Local**  **Connected**

**Local Access**  
Please use the following Environment ID in order to process the environment queue locally. To learn more about the development process, please refer to our documentation .

**Environment Variables**   **+ ADD**

ID	KEY	VALUE	SECURE
VAR-8068-9467	API_KEY	*****	true
VAR-6416-9298	LOG_LEVEL	info	—
VAR-1890-4285	API_ENDPOINT	*****	true

Rows per page: 10 | 1–3 of 3 |  

**Task Metrics**   


Your exported spreadsheet file provides the required environment variables and their values within the **Data** sheet. This file also provides general information, such as your account name and identifier, associated extension, environment, product, and export date.



## Task Details

If your task in the task queue is failed, the system allows examining your failed task details, such as a task category, error message, and more. Refer to the Extension Project documentation to learn the difference between various task categories within the DevOps module.

Locate your failed task under **Task Queue** via the *Extension Details* screen. Thereafter, click on the vertical ellipsis (⋮) icon and select **Details** to access the Task Details screen.

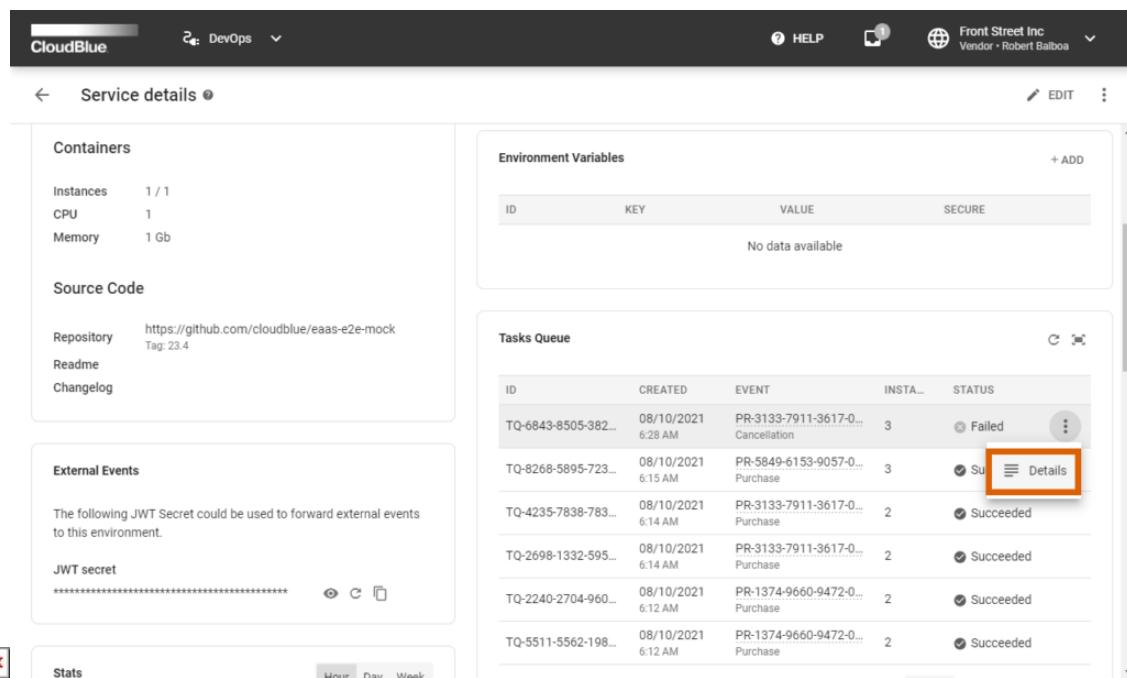

Service details

Containers

Instances 1 / 1  
CPU 1  
Memory 1 Gb

Source Code

Repository <https://github.com/cloudblue/eaaS-e2e-mock>  
Tag: 23.4  
Readme  
Changelog

External Events

The following JWT Secret could be used to forward external events to this environment.

JWT secret


\*\*\*\*\* [C](#) [D](#)

Stats [Hour](#) [Day](#) [Week](#)

Environment Variables

Tasks Queue

ID	CREATED	EVENT	INSTA...	STATUS
TQ-6843-8505-382...	08/10/2021 6:28 AM	PR-3133-7911-3617-0...	3	<span>Failed</span>
TQ-8268-5895-723...	08/10/2021 6:15 AM	PR-5849-6153-9057-0...	3	<span>Succeeded</span>
TQ-4235-7838-783...	08/10/2021 6:14 AM	PR-3133-7911-3617-0...	2	<span>Succeeded</span>
TQ-2698-1332-595...	08/10/2021 6:14 AM	PR-3133-7911-3617-0...	2	<span>Succeeded</span>
TQ-2240-2704-960...	08/10/2021 6:12 AM	PR-1374-9660-9472-0...	2	<span>Succeeded</span>
TQ-5511-5562-198...	08/10/2021 6:12 AM	PR-1374-9660-9472-0...	2	<span>Succeeded</span>

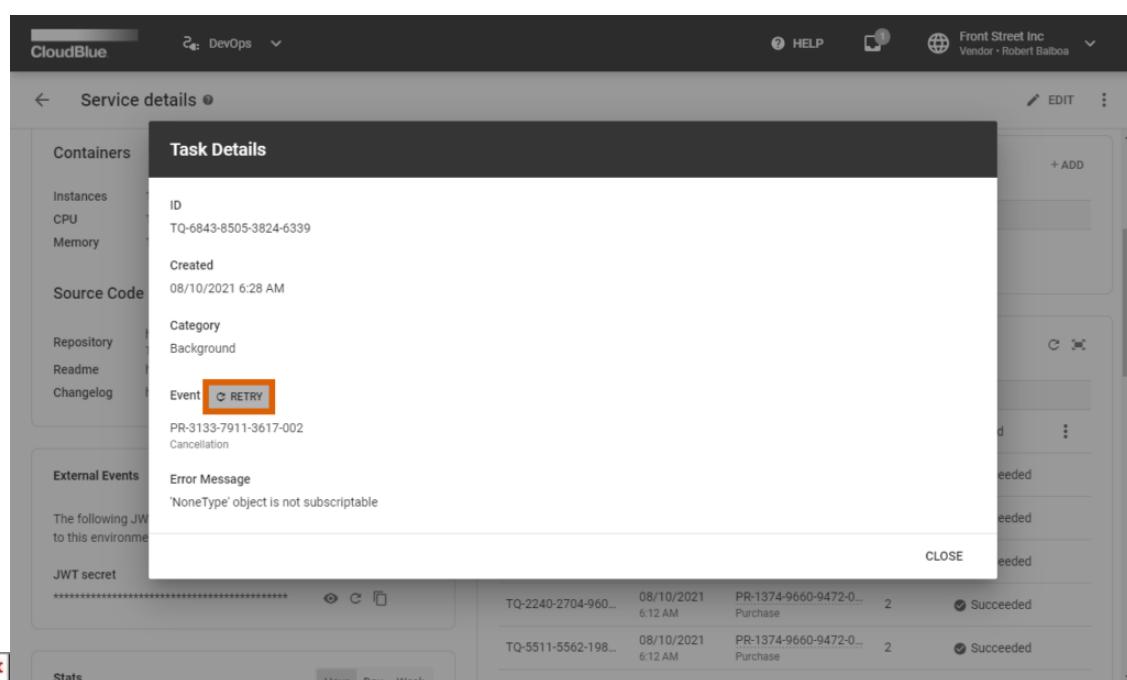

Service details

Containers

Instances  
CPU  
Memory

Source Code

Repository  
Readme  
Changelog

External Events

The following JWT Secret could be used to forward external events to this environment.

JWT secret

\*\*\*\*\* [C](#) [D](#)

Task Details

ID TQ-6843-8505-3824-6339

Created 08/10/2021 6:28 AM

Category Background

Event [RETRY](#) PR-3133-7911-3617-002  
Cancellation

Error Message 'NoneType' object is not subscriptable

CLOSE

TQ-2240-2704-960...	08/10/2021 6:12 AM	PR-1374-9660-9472-0...	2	<span>Succeeded</span>
TQ-5511-5562-198...	08/10/2021 6:12 AM	PR-1374-9660-9472-0...	2	<span>Succeeded</span>




Note that the system allows you to manually restart your failed task. Click the **Retry** button from the *Task Details* screen. Therefore, the system will process your selected task once again.


## Logging

In case your environment is deployed in the *Local* mode, your logs will be generated locally. If your environment is running in the *Cloud* mode, your generated logs will be displayed within your added service details screen on Connect. Logs are used to receive detailed information about request state changes, unhandled exceptions and other events. The system allows switching logging levels as follows:

Click the **Settings** button in the *Events* section of the Extension Details screen. The system prompts you to select one of the following logging levels:

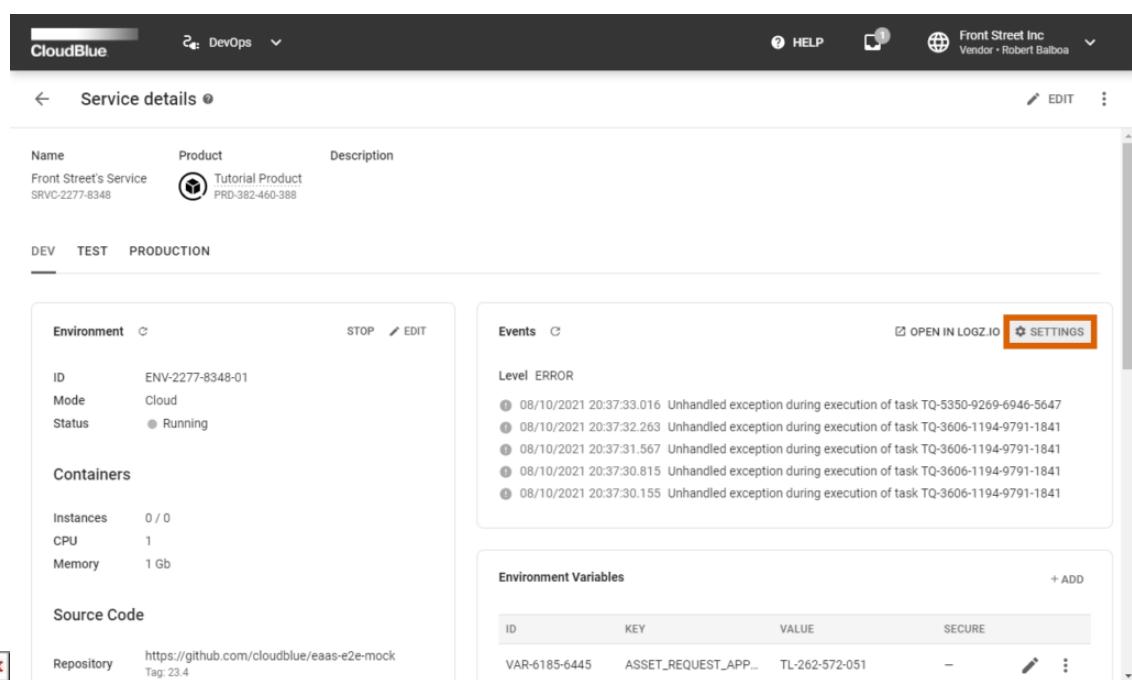

The screenshot shows the 'Service details' screen for 'Front Street's Service'. The 'Events' section is open, showing a list of errors with the 'SETTINGS' button highlighted. The 'Environment' section shows the service is running in Cloud mode. The 'Source Code' section shows the repository is https://github.com/cloudblue/eaaS-e2e-mock. The 'Environment Variables' section shows a single variable: VAR-6185-6445, ASSET\_REQUEST\_APP..., TL-262-572-051.

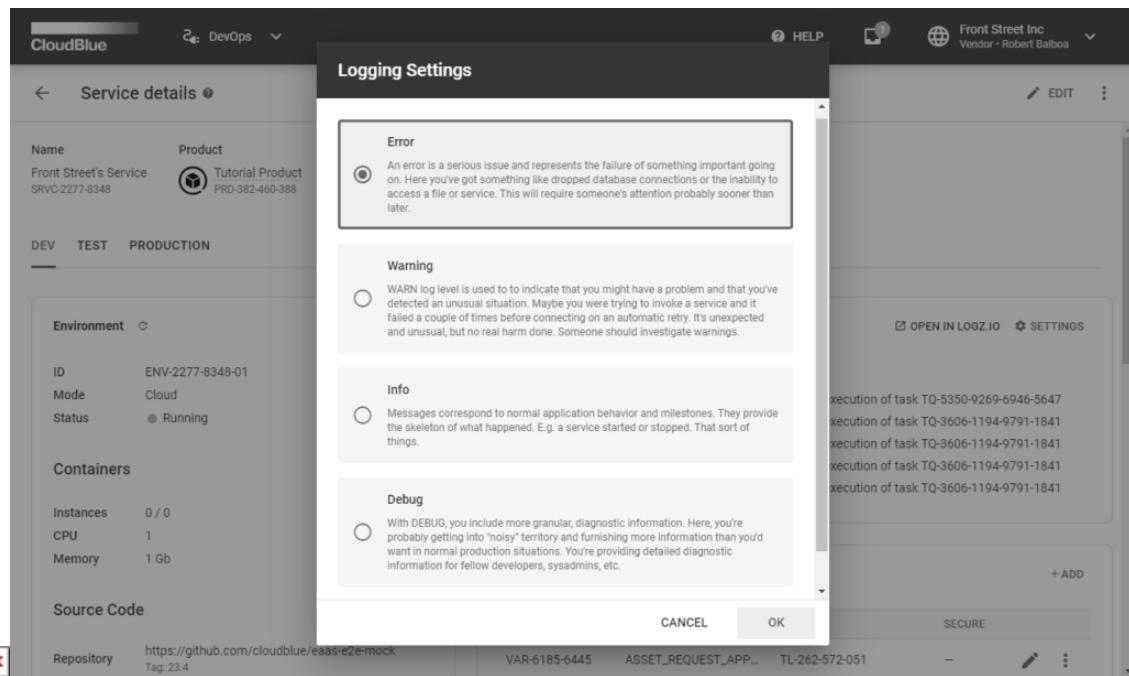


- **Error:** An error represents a major issue or a failure of an important process. Errors are usually associated with database connection drops or with the inability to access required files or services. Thus, errors often require immediate attention.
- **Warning:** This logging level indicates that the system detected a problem or an unusual event. For instance, in case a user tries to invoke a service and this service fails to connect the first time. Consequently, this service can be connected on an automatic retry and the system registers this unexpected or unusual event. Warnings do not represent major issues; however, it is recommended to investigate your warnings.
- **Info:** This logging level is used to register regular events and normal application behavior. It allows understanding what is happening within your service and the system. For example, when your service is stopped or started to work.
- **Debug:** This logging level features more granular and detailed information. This provides diagnostic data for developers, sysadmins, etc.

Note that the system also allows utilizing the logz.io service to access logging data within the Kibana interface. Use the **Open in the Logz.io** button to access this service.

## Schedules

The **Schedules** section of the Extension Details screen, as the name suggests, is used to schedule the processing of your service tasks. Once your environment is deployed, locate the *Schedules* section and click the **Add** button. Therefore, the system launches a wizard that is used to create a new schedule for your service:

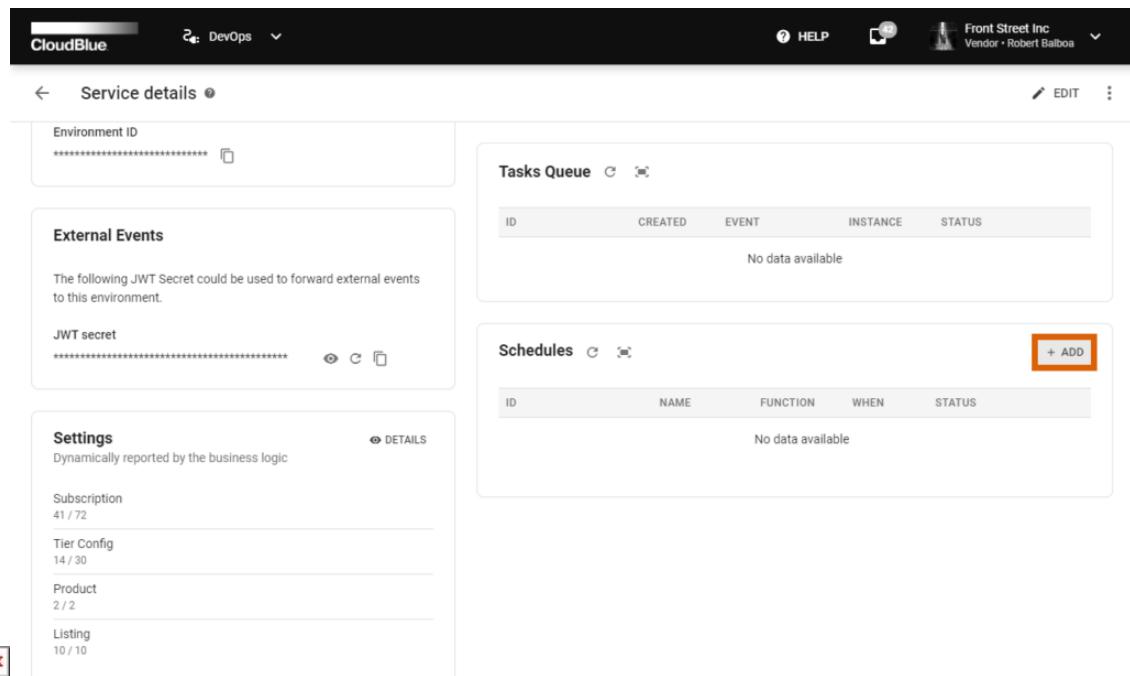

CloudBlue DevOps Front Street Inc Vendor • Robert Balboa

Service details

Environment ID

External Events

The following JWT Secret could be used to forward external events to this environment.

JWT secret

Settings

Dynamically reported by the business logic

Subscription 41 / 72

Tier Config 14 / 30

Product 2 / 2

Listing 10 / 10


Tasks Queue

ID	CREATED	EVENT	INSTANCE	STATUS
No data available				

Schedules

+ ADD

ID	NAME	FUNCTION	WHEN	STATUS
No data available				

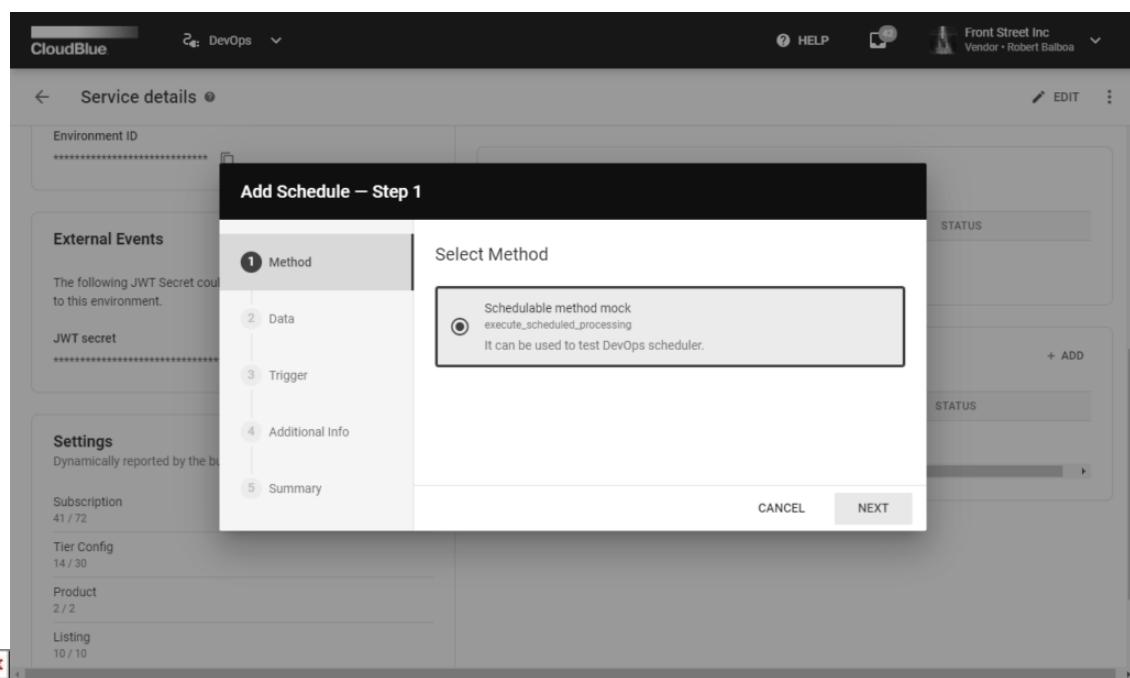

CloudBlue DevOps Front Street Inc Vendor • Robert Balboa

Service details

Environment ID

External Events

The following JWT Secret could be used to forward external events to this environment.

JWT secret

Settings

Dynamically reported by the business logic

Subscription 41 / 72

Tier Config 14 / 30

Product 2 / 2

Listing 10 / 10

Add Schedule – Step 1

1 Method

2 Data

3 Trigger



4 Additional Info



5 Summary

Select Method

Schedulable method mock execute\_scheduled\_processing  
It can be used to test DevOps scheduler.

CANCEL NEXT

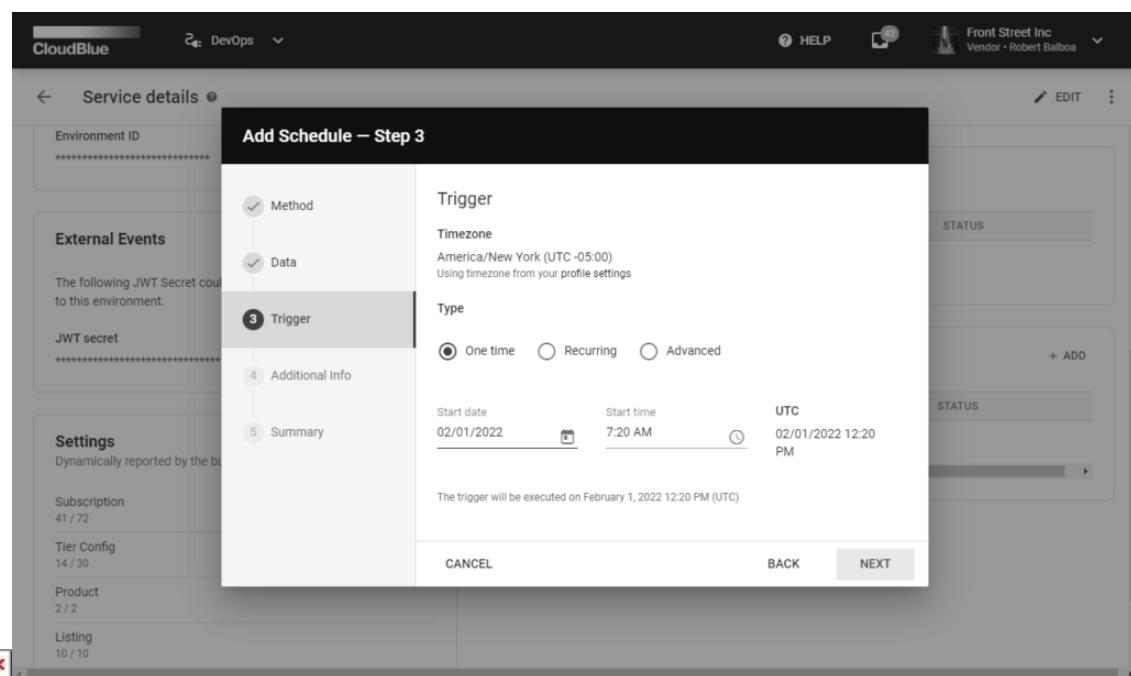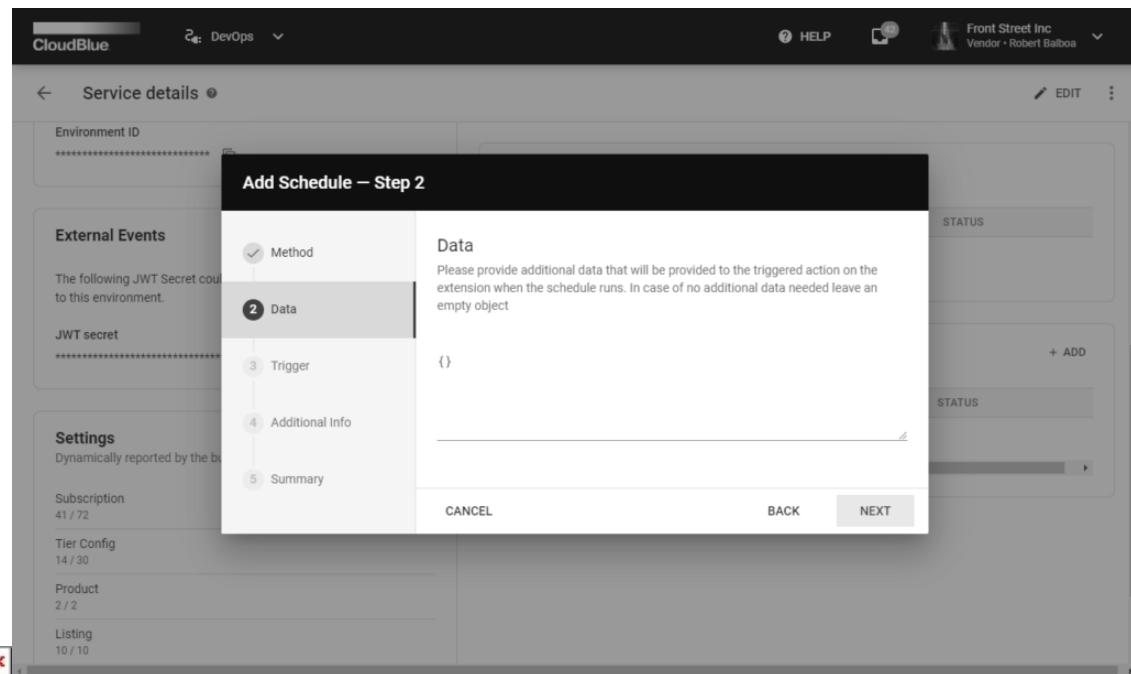

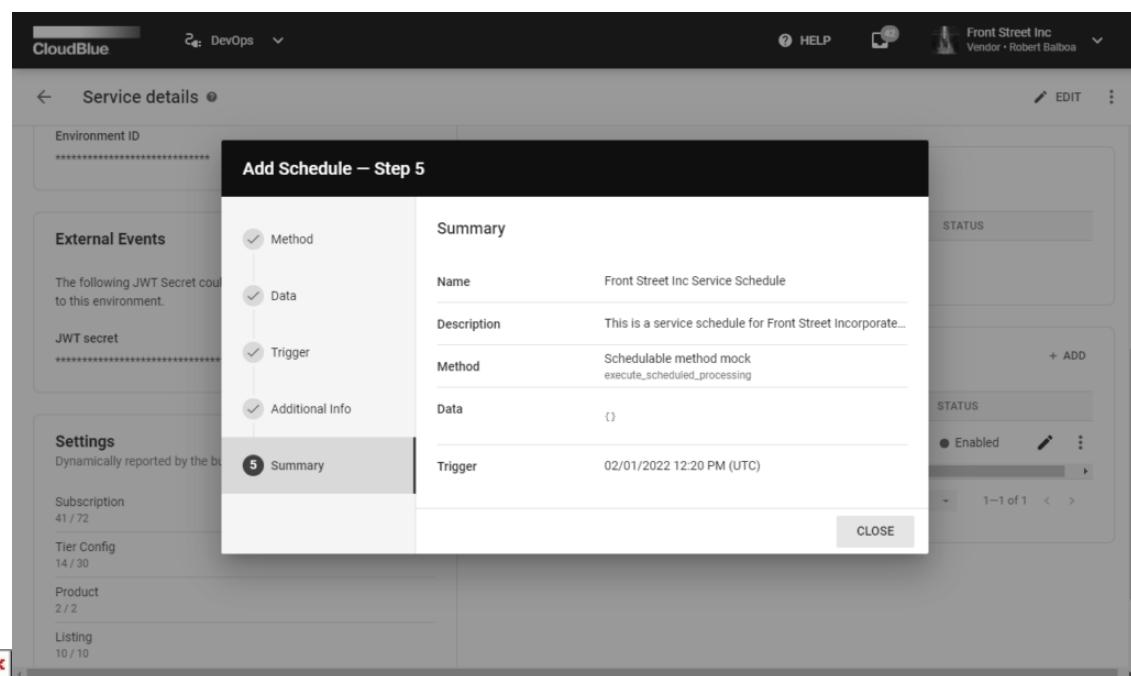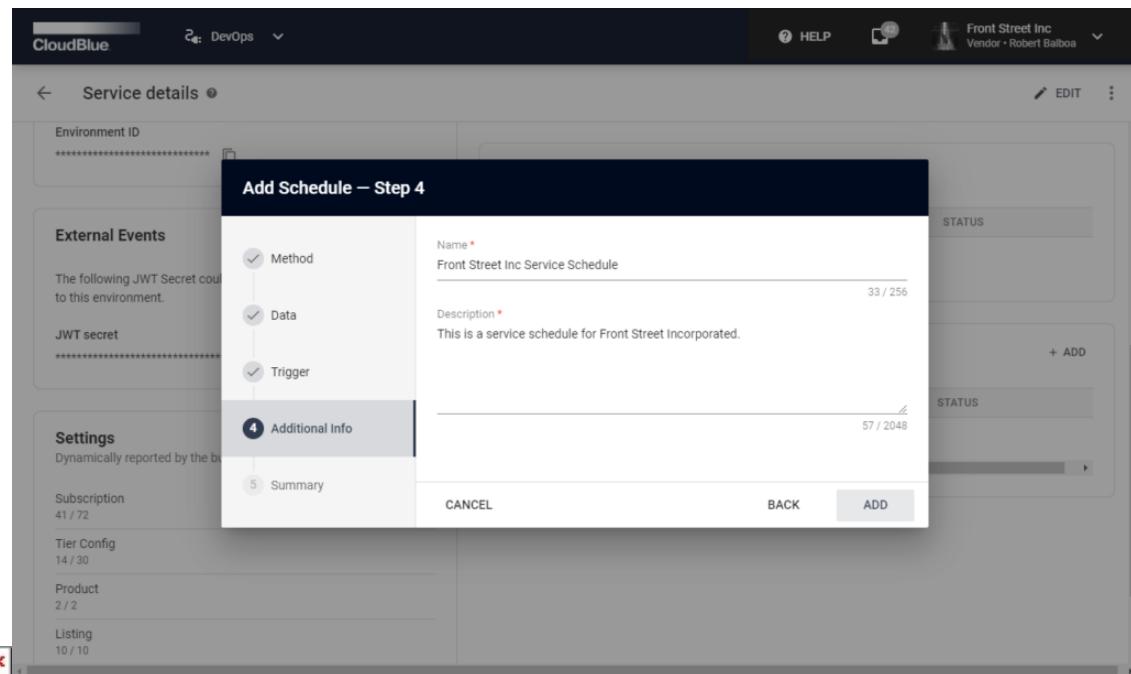

- Method:** The wizard prompts you to select your schedule method.
- Data:** Additional JSON data can be provided for your triggered action once the schedule is activated. In case no additional data is required, leave an empty JSON object.
- Trigger:** This step allows configuring a trigger for your schedule. The system also requires selecting one of the following trigger types:
  - One time: Specify date and time for one time trigger activation.

- **Recurring:** Configure recurring trigger activation by selecting this type. Thus, the system allows specifying the number of repeated activations (e.g., every hour/day/week/month, every 2 hours/days/weeks/months, etc.) and start date/time for your trigger activations. It is also possible to check the End Date checkbox and select date and time to stop your recurring trigger activations.

**Note:** In case the *monthly* schedule is selected, the system will automatically trigger activation at the beginning of each month. Therefore, if a different date is required, it is necessary to provide a cron expression for this task.

- **Advanced:** Provide an expression for your trigger. Such expressions usually represent strings that consist of six or seven subexpressions (fields). These subexpressions describe individual details of your schedule.

#### 4. **Additional Info:** This wizard requires to enter a name and description for your schedule object.

Click the **Add** button to successfully create a schedule object. As a result, the system provides a summary for your created schedule object. Review the summary and click the **Close** button to finalize your schedule configuration