



<https://cloudblue.com>

[Documentation](#)  [Modules](#)  [DevOps](#) 

DevOps Interface



This article has been generated from the online version of the documentation and might be out of date. Please, make sure to always refer to the online version of the documentation for the up-to-date information.

Auto-generated at April 14, 2026



The DevOps module on the CloudBlue Connect platform is used to add and manage your extensions. This module is also used to monitor your deployed environments, manage your environment variable and settings, and accessing your logs and events.

Follow the instructions below to add your extension object and perform various operations with your extension on the Connect platform.

Adding Extensions

Before starting to deploy and configure with your extension, it is required to define an object for your extension on the Connect platform. Start creating a new extension by navigating to the *DevOps* module and clicking **Add Extension**.

The system provides the following configuration options that allow defining your extension project:






No extensions

Manage extensions.

Please see our [documentation](#) to learn more.



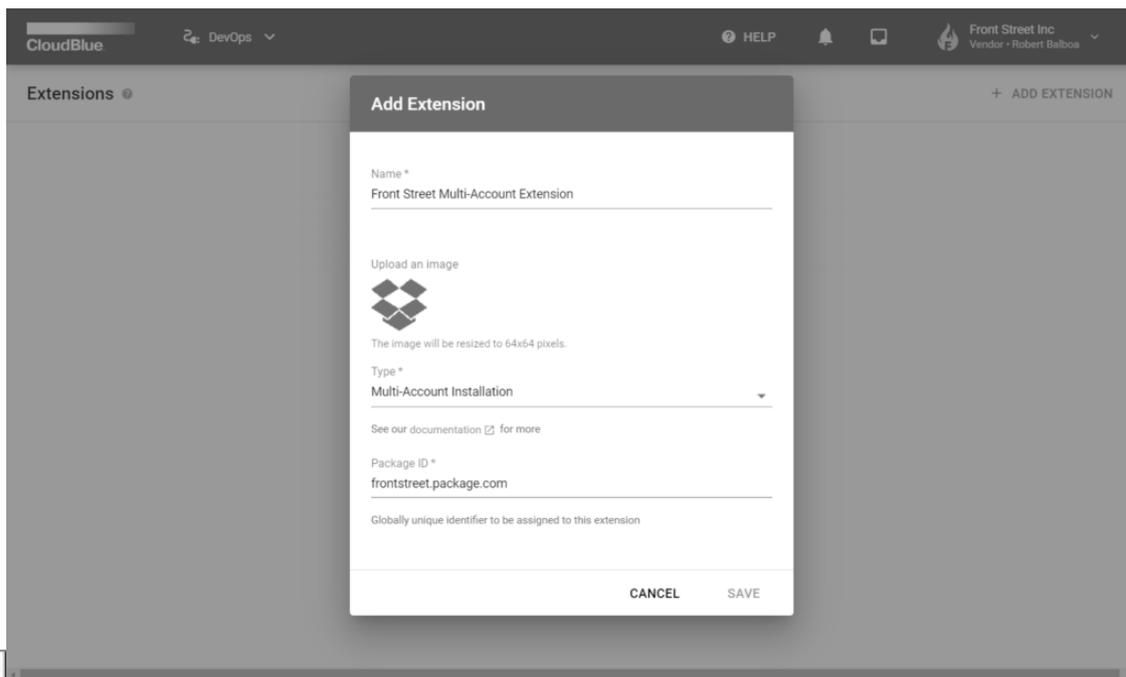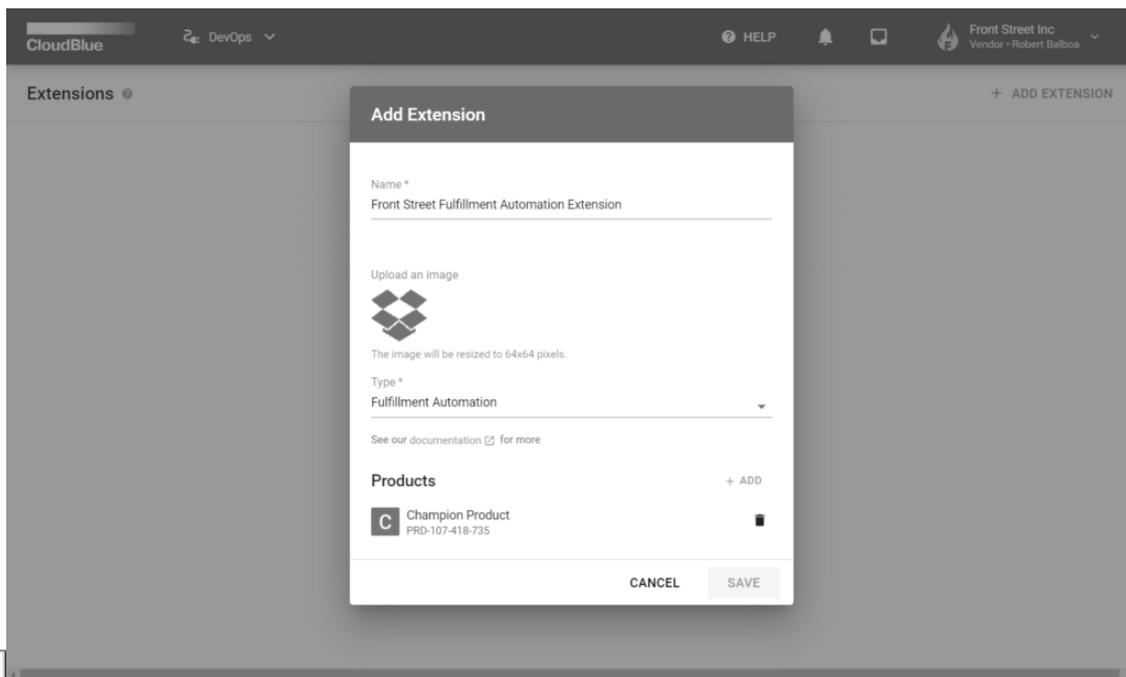

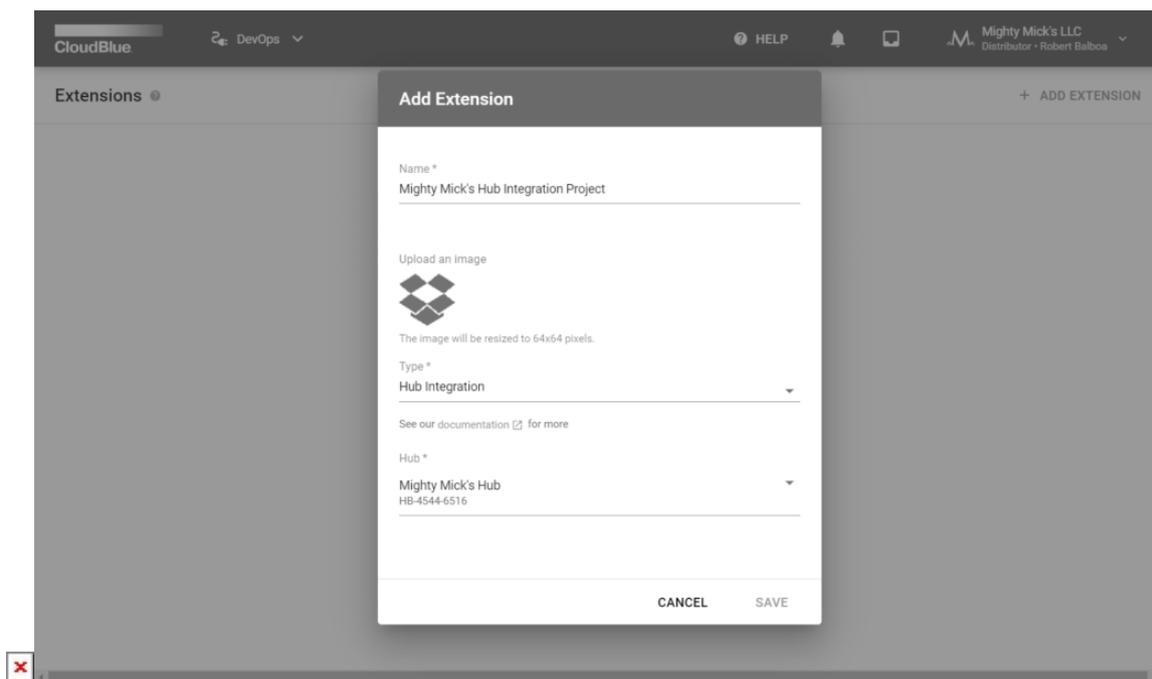

1. **Name:** Specify a name for your new extension object.
2. **Upload an image:** Provide an image for your extension project if necessary.
3. **Type:** The system requires to select one of the following extension types:
 - *Multi-Account Installation:* This extension type is used to create an extension to streamline or automate various business scenarios. Multi-accounts extensions will be available for your business partners and other organizations with your provided invites. The system also allows publishing such extensions for the public access.
 - *Commerce Transformations:* Use this type to create an extension for working with commerce systems. The commerce transformations type provides the same functionality as multi-account installation extensions.
 - *Fulfillment Automation:* This type is used to create an extension for automating the Fulfillment Request approvals. The system enables to specify products that will work with your extension. Note that this extension type is available only for Vendor accounts.
 - *Hub Integration:* Select this type to establish integration with your registered Hub on the Connect platform. The system requires to specify your package identifier in the following format: `cloudblue.connect.package`. This extension type is available only for Distributors and Resellers.

Click the **Save** button to finalize the initial setup for your extension object on the Connect platform. Continue configuring your extension as it is described in the Extension Project documentation.

Service Details

Once a new extension object is added to the DevOps module, the system allows accessing the **Extension Details** screen. It provides detailed information on your deployed service and enables to perform various operations with your extension.



Multi-Account Extension Management

If the *multi-account* extension type is selected and your service is deployed, the system allows managing each installation, generating invitations for your business partners, and perform other actions. For more information on the operations that are exclusive to this extension type, refer to the Multi-Account Service documentation.

The following describes the provided graphical user interface and showcases essential operations within the Extension Details screen:

The screenshot displays the 'Extension Details' page for 'Auto-approve requests' in the CloudBlue DevOps interface. The page includes a navigation bar with 'CloudBlue' and 'DevOps' menus, and a user profile for 'Acronis'. The main content area is divided into several sections:

- Header:** Shows the extension name 'Auto-approve requests' and an 'EDIT' button.
- Table:** A table with columns 'ID', 'Type', and 'Products'. The first row shows 'SRVC-4202', 'Fulfillment Automation', and '3'.
- Navigation:** Tabs for 'DEV', 'TEST', 'PRODUCTION', 'PRODUCTS', and 'AUDIT TRAIL'. 'DEV' is currently selected.
- Environment:** A panel showing details for 'ENV-4202-01', including Mode (Cloud), Status (Running), Containers, Instances (1/4), CPU (2), and Memory (4Gb). It also lists Source Code (Repository, Readme, Changelog).
- Logging:** A panel titled 'Level INFO' with 'OPEN IN LOG2.IO' and 'SETTINGS' options. It contains a list of log events with timestamps and descriptions.
- Environment Variables:** A table with columns 'ID', 'KEY', 'VALUE', and 'SECURE'. It lists several variables like 'API_KEY', 'LOG_LEVEL', 'API_URL', etc.
- External Events:** A section for 'JWT secret' and 'API endpoint'.





The screenshot shows the 'Auto-approve requests' extension details page. It includes a header with 'CloudBlue' and 'DevOps' tabs, and an 'EDIT' button. Below the header, there's a breadcrumb trail: 'DEV' > 'TEST' > 'PRODUCTION' > 'PRODUCTS' > 'AUDIT TRAIL'. The main content area is divided into two columns. The left column contains four line charts under the heading 'Stats': 'CPU' (Average 50%), 'Memory' (Average 30%), 'Network Incoming' (Average 10%), and 'Network Outgoing' (Average 10%). The right column contains two line charts under the heading 'Task Metrics': 'Processing' (Average 5) and 'Total' (Average 30). Below these charts is a 'Tasks Queue' table with columns for ID, CREATED, EVENT, and STATUS. The table lists several tasks with their respective IDs, creation times, events, and statuses (Scheduled, Failed, Rescheduled, Processing). A pagination bar at the bottom of the table shows 'Previous', '1', '2', '3', '13', and 'Next', with a total of 128 rows.



The screenshot shows the 'Auto-approve requests' extension details page, focusing on configuration options. It includes the same header and breadcrumb trail as the previous screenshot. The main content area is divided into several sections: 'Extension Features' with a list of features (Events Processing, Web Application, Custom API, Anvil Application) and their status (Enabled, Unavailable); 'Schedules' with a '+ ADD' button and a 'No data' message; 'UI Components' with a table listing components and their integration points; and 'Subscribed System Events' with a list of events and their status (Supported). A 'Permissions' section at the bottom shows a list of permissions (Customers, Products, Subscriptions, Tier Config, Listings) with checkboxes.



In case it is required to change the name or image of your extension, click the **Edit** button at the top-right corner of the screen. In addition, the vertical ellipsis () button allows deleting extension on the Connect platform.

Removing Services and Switching Environments

Note that it is possible to delete an extension only in case all of your environments are stopped or disconnected. The system also allows to switch your environment mode (i.e., switching your local environment to the Cloud mode and vice versa) only in case this environment is stopped, uninitialized or disconnected.

The Extension Details screen enables Connect users to access Developer (*Dev*), Production (*Prod*) and Staging (*Test*) environments via corresponding tabs on the user interface. The system provides the following sections within each tab:

- **Environment:** This section displays your environment mode (*Local* or *Cloud*) and its status (*Deploying*, *Disconnected*, *Connected*, *Running*, *Stopped*, or *Errored*). Enable or disable your environment by using corresponding buttons on the user interface. Click the *Edit* button to configure your environment as described below. In case the Cloud mode is connected, this section also displays your deployed container instances, CPUs and memory. Furthermore, this section also displays your specified Git repository and provides links to your readme and changelog files.
- **Local Access:** This section is available in case the *Local* mode is selected. This section provides an *Environment ID* that is used to process your environment queue locally. Copy the link by using the corresponding icon from this section.
- **External Events:** Provides a *JWT secret* that is required to forward external events to your selected environment. Show/hide or copy your JWT secret by using corresponding icons within this section.
- **Environment Variables:** Specify your environment variables with this section. Click the *Add* button to define a new value for your required variable. In addition, import or export your variables list by using corresponding buttons in this section. Click on the *edit icon* to change a variable from the list. Delete your variable by clicking on the vertical ellipsis () icon.
- **Tasks Queue:** Use this section to examine tasks queue for your environment. For example, this queue may include pending fulfillment requests or tier configuration request that should be processed by Vendors systems. Note that in addition to *processing* tasks queue instances, the DevOps module allows you to *schedule* and *reschedule* your tasks.
- **Permissions:** Provides required permissions to access associated modules on the CloudBlue Connect platform. Namely, the system displays modules that can be accessed by your extension.

Once your extension is deployed successfully, the Extension Details screen also displays the following information within your *connected* or *running* environment tabs:

- **Stats:** This section provides resource monitors that shows your *CPU*, *Memory* and *Network* utilization. Switch between your *hour*, *day* and *week* statistics by using the corresponding buttons in this section.
- **Events:** Use this section to review event logs of your selected environments in the *Cloud* mode. Note that the system uses the logz.io extension with a Kibana UI to generate your event logs, create alerts, and more.
- **UI Components:** Displays associated user interface components and their integration point. For instance, this may include auto-approve request components for your fulfillment automation extension.
- **Subscribed System Events:** Provides system events on the Connect platform. Specifically, this section displays event types and whether each type is supported by your extension.
- **Extension Features:** Review features that are enabled for your extension. The system specifies whether your extension includes *event processing*, *web application*, *custom API* methods, and the Anvil.Works application functionality.
- **Custom API Methods:** This represents a list of custom API methods that are provided by your extensions and that can be used once the extension is installed. It also includes an endpoint to interact with the API.




- **Schedules:** Used to schedule the processing of your extension tasks. Detailed information on how to configure and manage your schedules is available under the corresponding heading in this article.

Environment Configuration

The system allows switching your environment between the *Local* and *Cloud* modes in case your environment is not running or connected.

Access the **Extension Details** screen and click the **Edit** button next to your environment mode and status information to start configuring your selected environment.

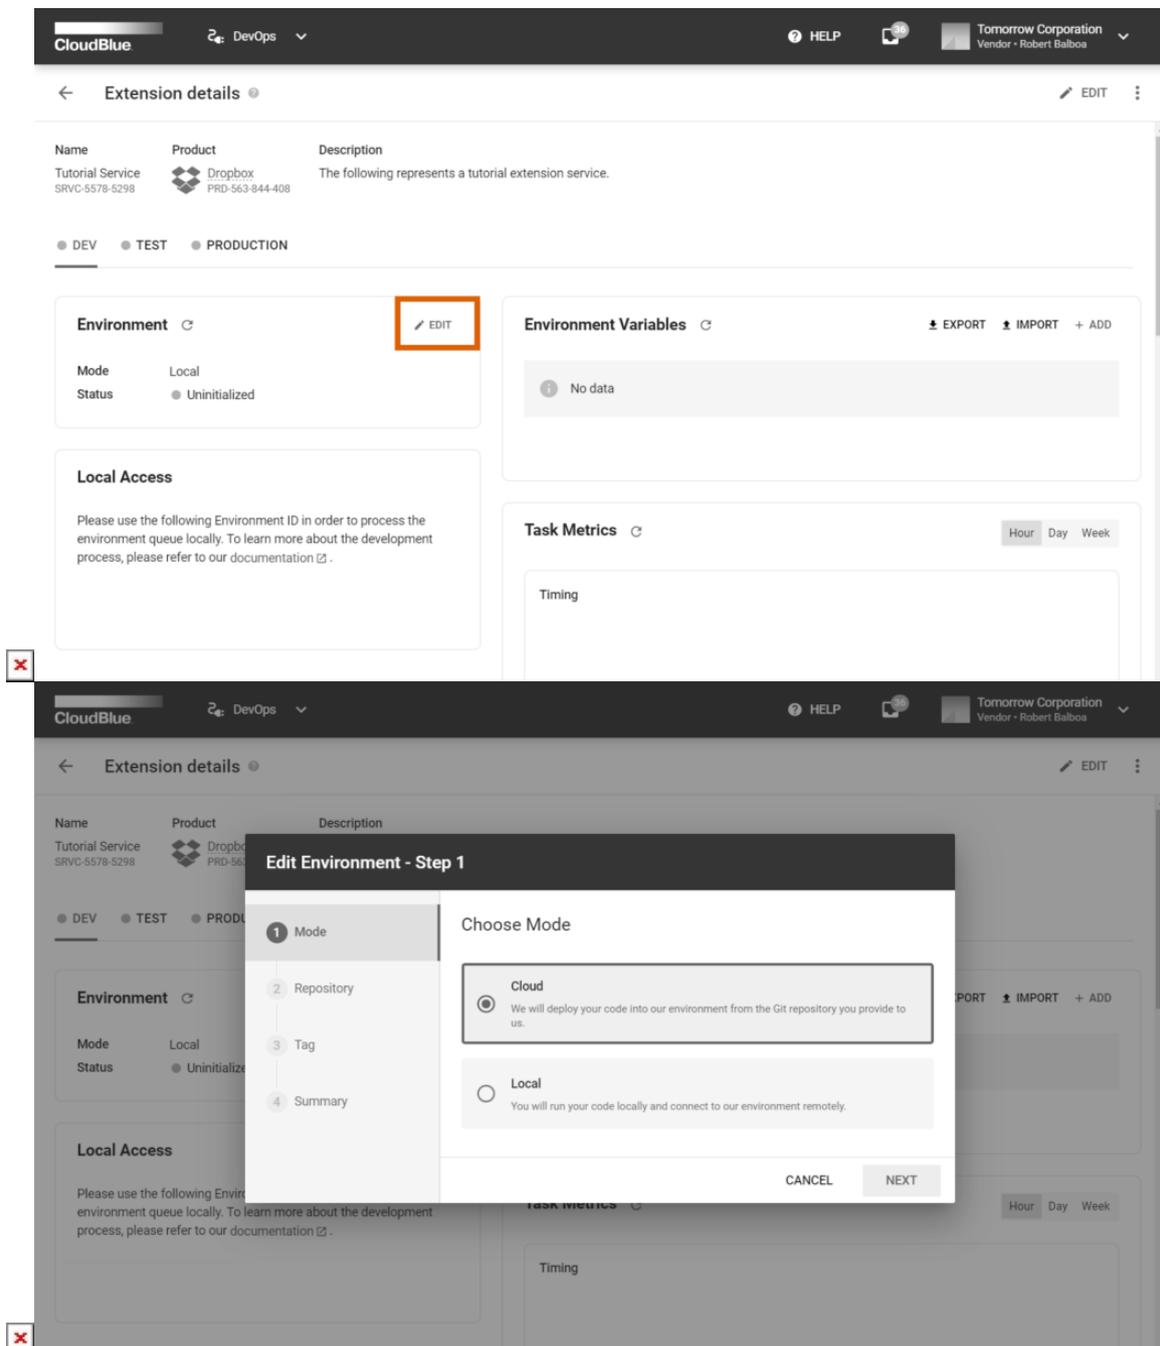



CloudBlue DevOps

HELP

Tomorrow Corporation
Vendor - Robert Balboa

← Extension details

Edit Environment - Step 2

Mode

2 Repository

3 Tag

4 Summary

Repository settings

Please provide the information below in order to deploy your environment using your code. The code must be available on a git server reachable on internet and must be accessible anonymously, using a username and password or a Personal Access Token.

To learn more, please read our documentation [🔗](#).

Git Repository URL *
`https://github.com/tomorrowllc/connect-extension`

Requires authorization

Username
`rbalboa@fstreet.com`

Password / Personal Access Token
.....

CANCEL BACK NEXT

Environment

Mode Local
Status ● Uninitialized

Local Access

Please use the following Environment ID to access your environment queue locally. To learn more about the process, please refer to our documentation [🔗](#).

Environment ID
`1C7CB183-E38A-4E49-962A-C...`



CloudBlue DevOps

HELP

Tomorrow Corporation
Vendor - Robert Balboa

← Extension details

Edit Environment - Step 3

Mode

Repository

3 Tag

4 Summary

Select repository tag

Search for tag

22.11	<input checked="" type="radio"/>
22.10	<input type="radio"/>
22.9	<input type="radio"/>
22.8	<input type="radio"/>
22.7	<input type="radio"/>
22.6	<input type="radio"/>
22.5	<input type="radio"/>
22.4	<input type="radio"/>
22.3	<input type="radio"/>

CANCEL BACK SAVE

Environment


Mode Local
Status ● Uninitialized

Local Access

Please use the following Environment ID to access your environment queue locally. To learn more about the process, please refer to our documentation [🔗](#).

Environment ID
`1C7CB183-E38A-4E49-962A-C...`



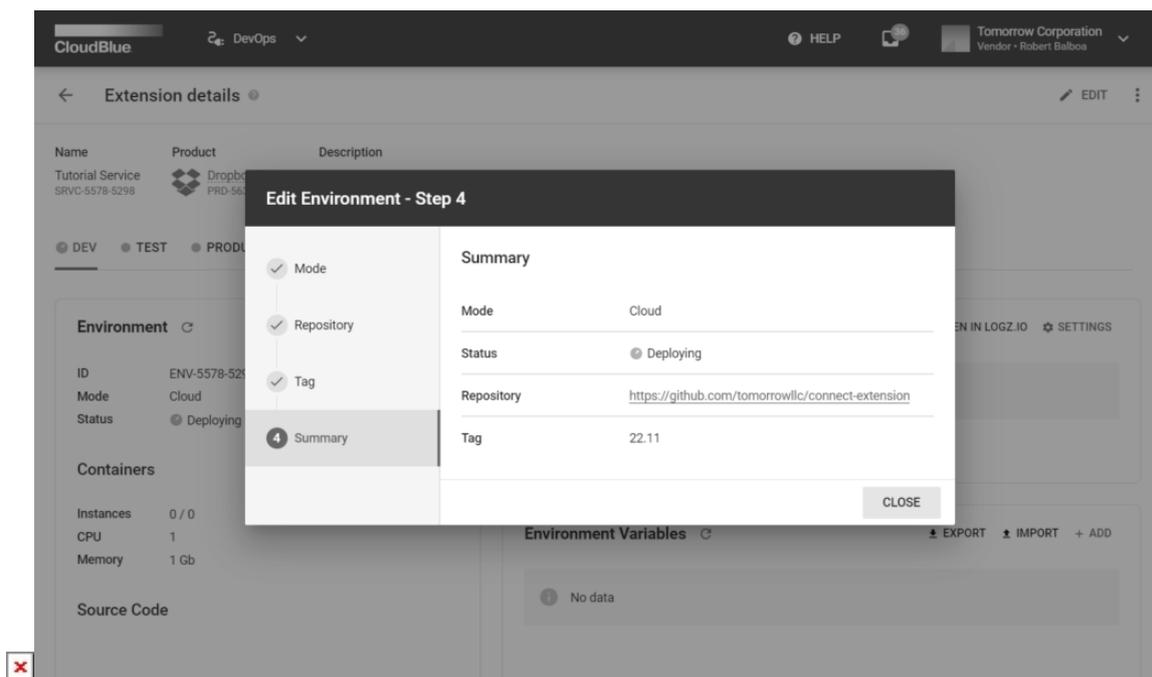

Therefore, the system provides a wizard that helps users with the following configuration:

1. **Mode:** Select the *Cloud* mode to deploy your extension on the Connect-managed infrastructure. Choose the *Local* mode to deploy your environment on your custom infrastructure.
2. **Repository:** Specify your Cloud repository and authorization details in the following form. Note that this wizard step is available only in case the *Cloud* mode is selected:
 - o **Git Repository URL:** Provide a link to your Git repository.
 - o **Requires authorization:** Check this checkbox in case your repository requires authorization.
 - o **Username:** Enter your Git username if authorization is required.
 - o **Password:** Specify your password in case authorization is required.
3. **Tag:** Specify your repository tag in the following form. This wizard step is available only in case the *Cloud* mode is selected.

As a result, the system provides an environment configuration summary. Make sure that your provided summary is correct and click the **Close** button.

Environment ID Specification

In case your service should be deployed locally, the system provides access details that are unique for each of your local environments and that are used to bootstrap your extension project. Specifically, it is required to copy your *Environment ID* and enter this identifier while providing environment configuration for your extension. Access your instance identifier as described below:



Environment

Mode: Local
Status: Connected

Local Access

Please use the following Environment ID in order to process the environment queue locally. To learn more about the development process, please refer to our documentation [📄](#).

Environment ID
16F0C104-404C-4587-BB59-884C386EA17D

Extension Features

Events Processing: Enabled
Web Application: Unavailable

Environment Variables

No data

Task Metrics HOUR DAY WEEK

Timing

Processing Average: 0



```

1. Introduction
2. Project: name
3. Project: root
4. Project: description
5. Project: version
6. Project: author
7. Project: license
8. Project: package
9. Project: asyncio
10. Project: CI
11. Config: API hostname
12. Config: API key
13. Config: environment ID
14. Extension: Extension type
15. Extension: Audience
16. Extension: Features
17. Extension: Events type
18. Extension: WebApp
19. Extension: Background events
20. Extension: Interactive events
21. Examples: variables
22. Summary
    
```

Enter the DevOps environment identifier to which your Extension will connect:
It can be found in the DevOps module of Connect within the Local Access widget.
See: https://connect.cloudblue.com/community/modules/devops/user-interface/#Service_Details

16F0C104-404C-4587-BB59-884C386EA17D

< Next > < Back > < Cancel >



1. Navigate to the environment that is necessary for bootstrapping extension project. Locate the required identifier under **Local Access** details. Use the provided button to copy your identifier.
2. Once you start bootstrapping your extension project, paste your identifier on the *Config: Environment ID* step.

Consequently, the Connect CLI will use your provided identifier for the subsequent configuration. For more information on the extension project creation, refer to the Extension Project documentation.






Environment Variables

Environment variables are essential for working with your extension. Such variables directly affect the way running processes will behave on your configured environment. Note that environment variables store parameter keys and their values, which then served as input to your provided service. Follow the guidelines below to add, import, and export your environment variables.

Adding Variables

Access the **Extension Details** screen and click the **Add** button under *Environment Variables* to define a new value for your environment variable:

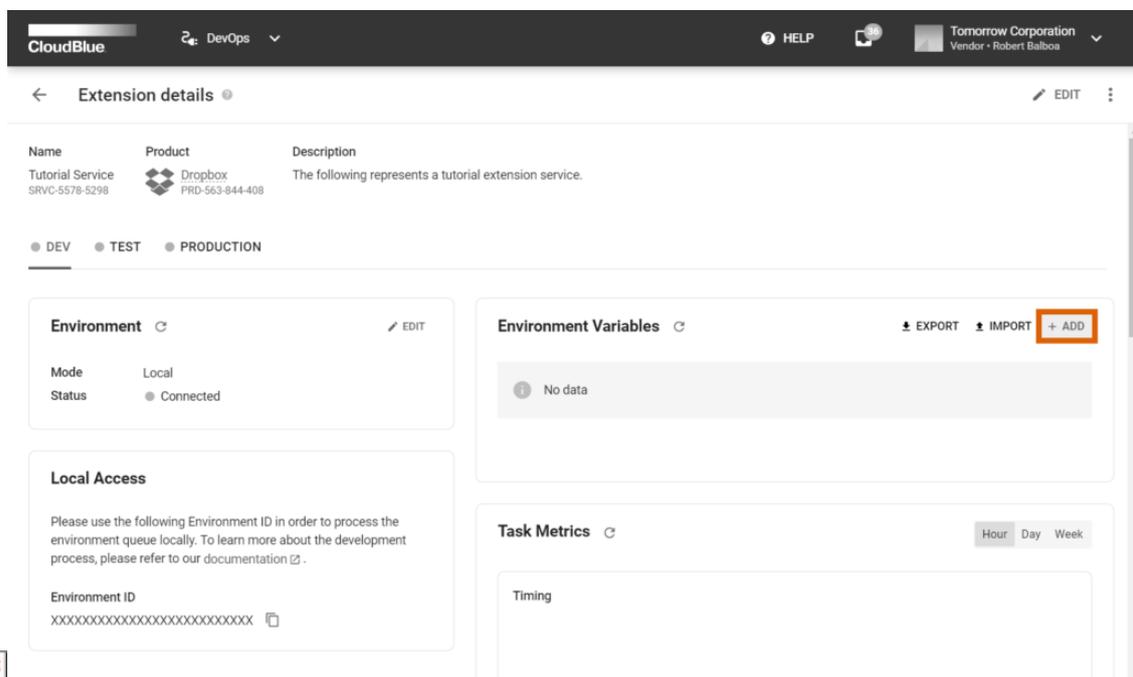

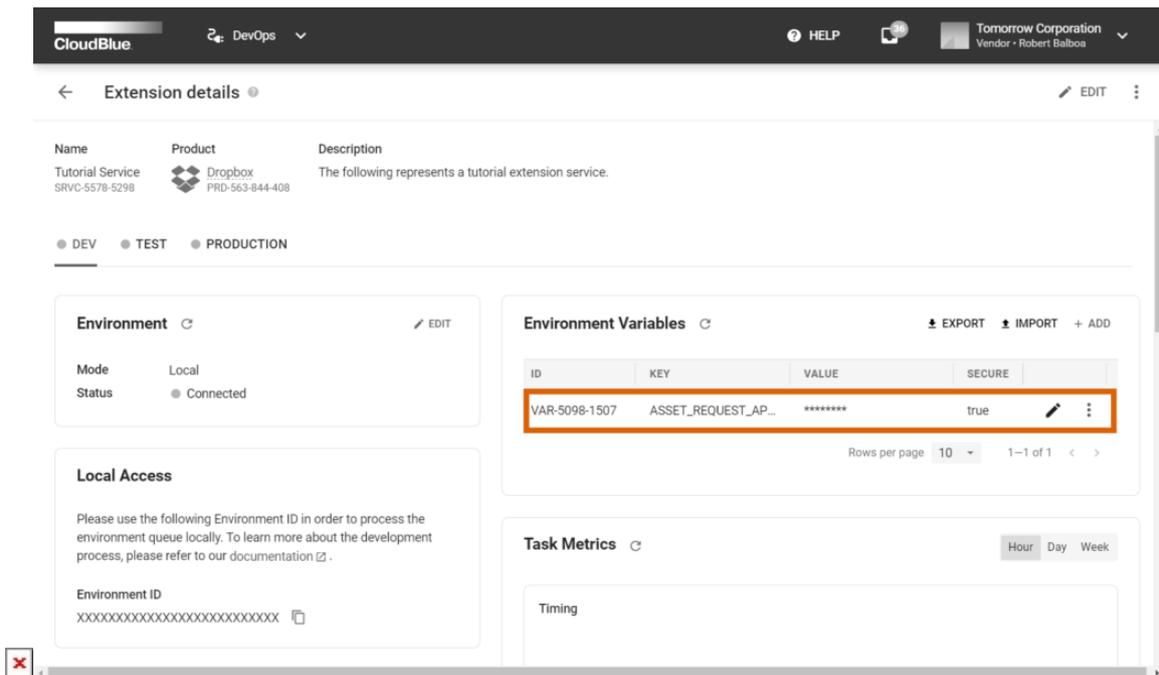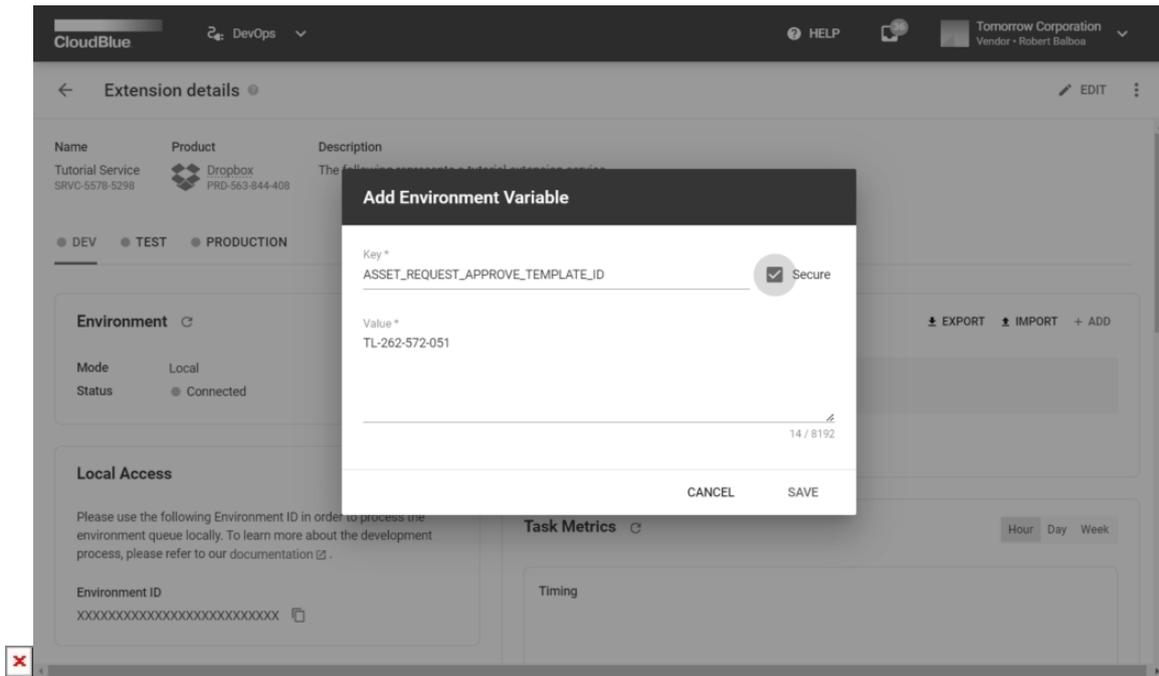

1. Provide your environment variable key (e.g., `ASSET_REQUEST_APPROVE_TEMPLATE_ID`).
2. Specify a value for your new key (e.g., activation template value: `TL-262-572-051`).
3. In case the **Secured** checkbox is checked, the provided value will be encrypted. Thus, this value can be used only by your extension project.
4. Add your new variable by using the **Save** button.



Once your environment variable is added, the system allows managing your variables by clicking on the *edit* icon. Note that in case your variable is secured, the system only allows changing your specified value. Your variable can also be removed by using the additional () menu.

Import Operation

The Connect platform allows importing your environment variables that are listed in the spreadsheet table. Create a XLSX file and name your sheet as **Data**. Next, enter your variable name in the first column. The second column should include your environment value. Furthermore, the third column must specify if your environment should be encrypted (yes) or not secured (no).

Note that the first row serves as the headers for your columns and thus the first row should contains the following text: **name**, **value** and **secure**. The images below provide an example of a filled spreadsheet file and illustrate the successful import operation to the Connect platform:

	A	B	C	D	E	F	G
1	name	value	secure				
2	API_Endpoint	https://api.tomorrow	yes				
3	LOG_LEVEL	info	no				
4	API_KEY	*****	yes				
5							
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							



CloudBlue DevOps HELP Tomorrow Corporation Vendor - Robert Balboa

Extension details

Name: Tutorial Service SRVC-5578-5298
Product: Dropbox PRD-563-844-408
Description: The following represents a tutorial extension service.

● DEV ● TEST ● PRODUCTION

Environment

Mode: Local
Status: ● Connected

Local Access

Please use the following Environment ID in order to process the environment queue locally. To learn more about the development process, please refer to our documentation [🔗](#).

Environment Variables

EXPORT **IMPORT** + ADD

No data

Task Metrics

Hour Day Week

Timing



CloudBlue DevOps HELP Tomorrow Corporation Vendor - Robert Balboa

Extension details

Name: Tutorial Service SRVC-5578-5298
Product: Dropbox PRD-563-844-408
Description: The following represents a tutorial extension service.

● DEV ● TEST ● PRODUCTION

Environment

Mode: Local
Status: ● Connected

Local Access

Please use the following Environment ID in order to process the environment queue locally. To learn more about the development process, please refer to our documentation [🔗](#).

Environment Variables

EXPORT **IMPORT** + ADD

Import Environment Variable

File Upload

My_Variables.xlsx
9.2 KB

1 file will be uploaded

CANCEL SAVE

Task Metrics

Hour Day Week

Timing





ID	KEY	VALUE	SECURE	
VAR-8068-9467	API_KEY	*****	true	
VAR-6416-9298	LOG_LEVEL	info	-	
VAR-1890-4285	API_ENDPOINT	*****	true	

Once your spreadsheet file is filled and ready for the import operation, access the **Extension Details** screen on Connect and click the **Import** button. Thereafter, browse your spreadsheet file or drag and drop this file to the following *File Upload* form.

In case the import operation is successful, click **Save** to finalize this operation. In case of an error, the system will provide detailed information on the issues with your spreadsheet file.

Export Operation

The system also allows exporting your variables that are specified within your particular environment. Therefore, the export operation can be essential to transfer your environment variables from one environment to another or to copy your variables to another extension instance on Connect.

Click the **Import** button to initiate this operation. Therefore, the exported spreadsheet file will be available in your browser's download directory.

CloudBlue DevOps

HELP Tomorrow Corporation
Vendor - Robert Balboa

← Extension details EDIT

Name Tutorial Service
SRVC-5578-5298

Product Dropbox
PRD-563-844-408

Description The following represents a tutorial extension service.

● DEV ● TEST ● PRODUCTION

Environment EDIT

Mode Local
Status ● Connected

Local Access

Please use the following Environment ID in order to process the environment queue locally. To learn more about the development process, please refer to our documentation.

Environment Variables EXPORT IMPORT + ADD

ID	KEY	VALUE	SECURE	
VAR-8068-9467	API_KEY	*****	true	
VAR-6416-9298	LOG_LEVEL	info	-	
VAR-1890-4285	API_ENDPOINT	*****	true	

Rows per page 10 1-3 of 3

Task Metrics Hour Day Week

CloudBlue DevOps

Downloads ENV-5578-5298-01.xlsx Open file

← Extension details EDIT

Name Tutorial Service
SRVC-5578-5298

Product Dropbox
PRD-563-844-408

Description The following represents a tutorial extension service.

● DEV ● TEST ● PRODUCTION

Environment EDIT

Mode Local
Status ● Connected

Local Access

Please use the following Environment ID in order to process the environment queue locally. To learn more about the development process, please refer to our documentation.

Environment Variables EXPORT IMPORT + ADD

ID	KEY	VALUE	SECURE	
VAR-8068-9467	API_KEY	*****	true	
VAR-6416-9298	LOG_LEVEL	info	-	
VAR-1890-4285	API_ENDPOINT	*****	true	

Rows per page 10 1-3 of 3

Task Metrics Hour Day Week

Your exported spreadsheet file provides the required environment variables and their values within the **Data** sheet. This file also provides general information, such as your account name and identifier, associated extension, environment, product, and export date.



Task Details

If your task in the task queue is failed, the system allows examining your failed task details, such as a task category, error message, and more. Refer to the Extension Project documentation to learn the difference between various task categories within the DevOps module.

Locate your failed task under **Task Queue** via the *Extension Details* screen. Thereafter, click on the vertical ellipsis () icon and select **Details** to access the Task Details screen.

The screenshot shows the 'Service details' page for a CloudBlue service. On the right side, there is a 'Tasks Queue' table. The table has columns for ID, CREATED, EVENT, INSTA..., and STATUS. One task is highlighted with a red box around its 'Details' button.

ID	CREATED	EVENT	INSTA...	STATUS
TQ-6843-8505-382...	08/10/2021 6:28 AM	PR-3133-7911-3617-0... Cancellation	3	Failed
TQ-8268-5895-723...	08/10/2021 6:15 AM	PR-5849-6153-9057-0... Purchase	3	Succeeded
TQ-4235-7838-783...	08/10/2021 6:14 AM	PR-3133-7911-3617-0... Purchase	2	Succeeded
TQ-2698-1332-595...	08/10/2021 6:14 AM	PR-3133-7911-3617-0... Purchase	2	Succeeded
TQ-2240-2704-960...	08/10/2021 6:12 AM	PR-1374-9660-9472-0... Purchase	2	Succeeded
TQ-5511-5562-198...	08/10/2021 6:12 AM	PR-1374-9660-9472-0... Purchase	2	Succeeded

The screenshot shows the 'Task Details' modal window. It displays the following information:

- ID:** TQ-6843-8505-3824-6339
- Created:** 08/10/2021 6:28 AM
- Category:** Background
- Event:** PR-3133-7911-3617-002 Cancellation
- Error Message:** 'NoneType' object is not subscribable

A 'CLOSE' button is located at the bottom right of the modal.



Note that the system allows you to manually restart your failed task. Click the **Retry** button from the *Task Details* screen. Therefore, the system will process your selected task once again.


Logging

In case your environment is deployed in the *Local* mode, your logs will be generated locally. If your environment is running in the *Cloud* mode, your generated logs will be displayed within your added service details screen on Connect. Logs are used to receive detailed information about request state changes, unhandled exceptions and other events. The system allows switching logging levels as follows:

Click the **Settings** button in the *Events* section of the Extension Details screen. The system prompts you to select one of the following logging levels:

The screenshot shows the 'Service details' page for 'Front Street's Service' (SRVC-2277-8348) in the 'PRODUCTION' environment. The 'Environment' section shows it is a 'Cloud' mode environment with 'Running' status. The 'Containers' section shows 0 instances with 1 CPU and 1 Gb memory. The 'Source Code' section shows the repository is 'https://github.com/cloudblue/eaas-e2e-mock' at tag '23.4'. The 'Events' section shows a list of error events with a 'SETTINGS' button highlighted in orange. The 'Environment Variables' section shows a table with one variable: 'ASSET_REQUEST_APP...' with value 'TL-262-572-051'.

ID	KEY	VALUE	SECURE
VAR-6185-6445	ASSET_REQUEST_APP...	TL-262-572-051	-

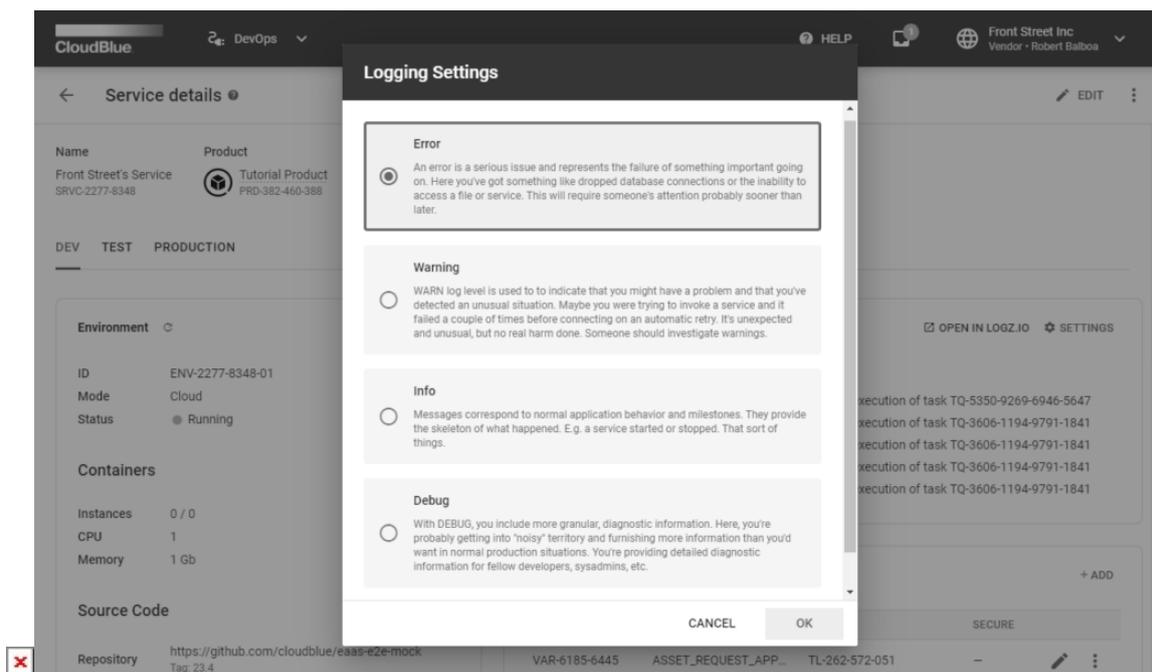

- **Error:** An error represents a major issue or a failure of an important process. Errors are usually associated with database connection drops or with the inability to access required files or services. Thus, errors often require immediate attention.
- **Warning:** This logging level indicates that the system detected a problem or an unusual event. For instance, in case a user tries to invoke a service and this service fails to connect the first time. Consequently, this service can be connected on an automatic retry and the system registers this unexpected or unusual event. Warnings do not represent major issues; however, it is recommended to investigate your warnings.
- **Info:** This logging level is used to register regular events and normal application behavior. It allows understanding what is happening within your service and the system. For example, when your service is stopped or started to work.
- **Debug:** This logging level features more granular and detailed information. This provides diagnostic data for developers, sysadmins, etc.

Note that the system also allows utilizing the logz.io service to access logging data within the Kibana interface. Use the **Open in the Logz.io** button to access this service.

Schedules

The **Schedules** section of the Extension Details screen, as the name suggests, is used to schedule the processing of your service tasks. Once your environment is deployed, locate the *Schedules* section and click the **Add** button. Therefore, the system launches a wizard that is used to create a new schedule for your service:





The screenshot shows the 'Service details' page in CloudBlue. The top navigation bar includes 'CloudBlue', 'DevOps', 'HELP', and 'Front Street Inc Vendor - Robert Balboa'. The main content area is divided into several sections:



- Environment ID:** A field with a copy icon.
- External Events:** A section containing a JWT secret and icons for visibility, refresh, and copy.
- Settings:** A section with a 'DETAILS' link and various configuration items: Subscription (41 / 72), Tier Config (14 / 30), Product (2 / 2), and Listing (10 / 10).
- Tasks Queue:** A table with columns ID, CREATED, EVENT, INSTANCE, and STATUS. It currently shows 'No data available'.
- Schedules:** A table with columns ID, NAME, FUNCTION, WHEN, and STATUS. It also shows 'No data available'. A red box highlights a '+ ADD' button in the top right corner of this section.



This screenshot shows the same 'Service details' page as above, but with a modal window open over the 'Schedules' section. The modal is titled 'Add Schedule - Step 1' and has a progress indicator on the left with five steps: 1. Method (selected), 2. Data, 3. Trigger, 4. Additional Info, and 5. Summary. The main content of the modal is 'Select Method', which lists a single option: 'Schedulable method mock' with the function name 'execute_scheduled_processing'. A description below the option states: 'It can be used to test DevOps scheduler.' At the bottom of the modal, there are 'CANCEL' and 'NEXT' buttons.



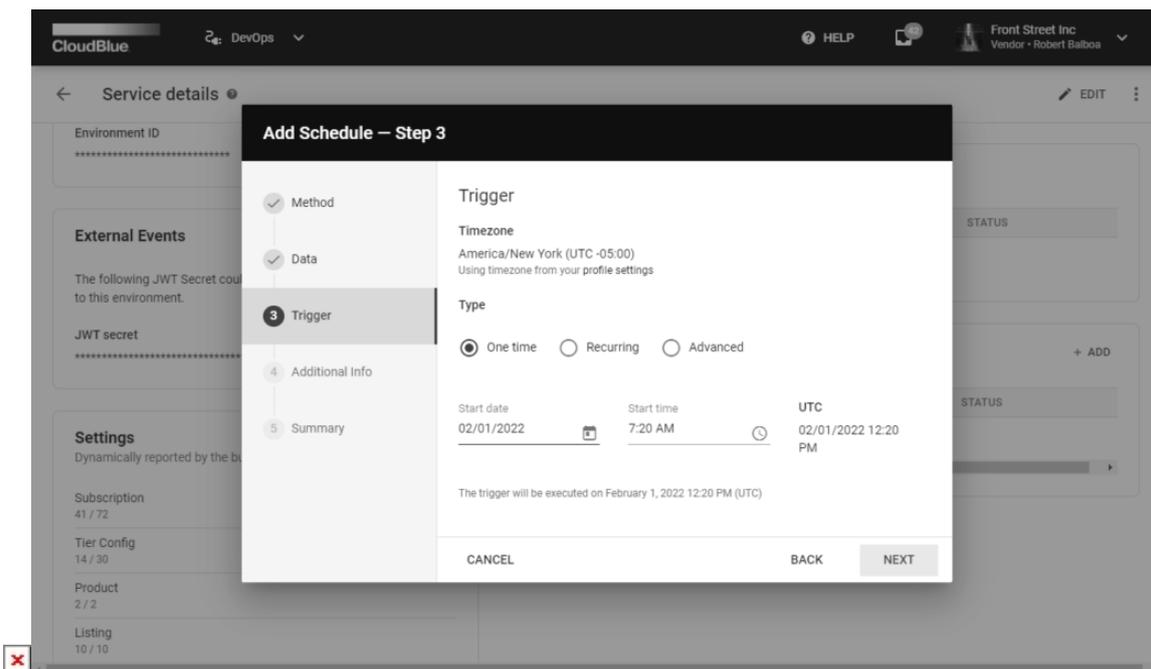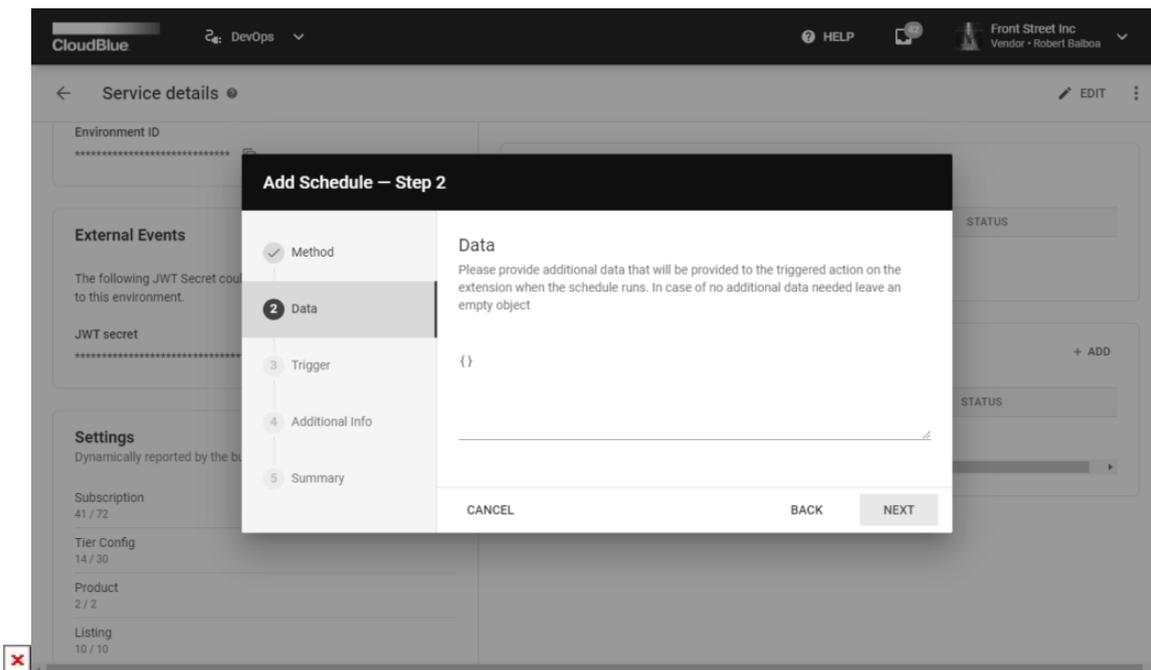

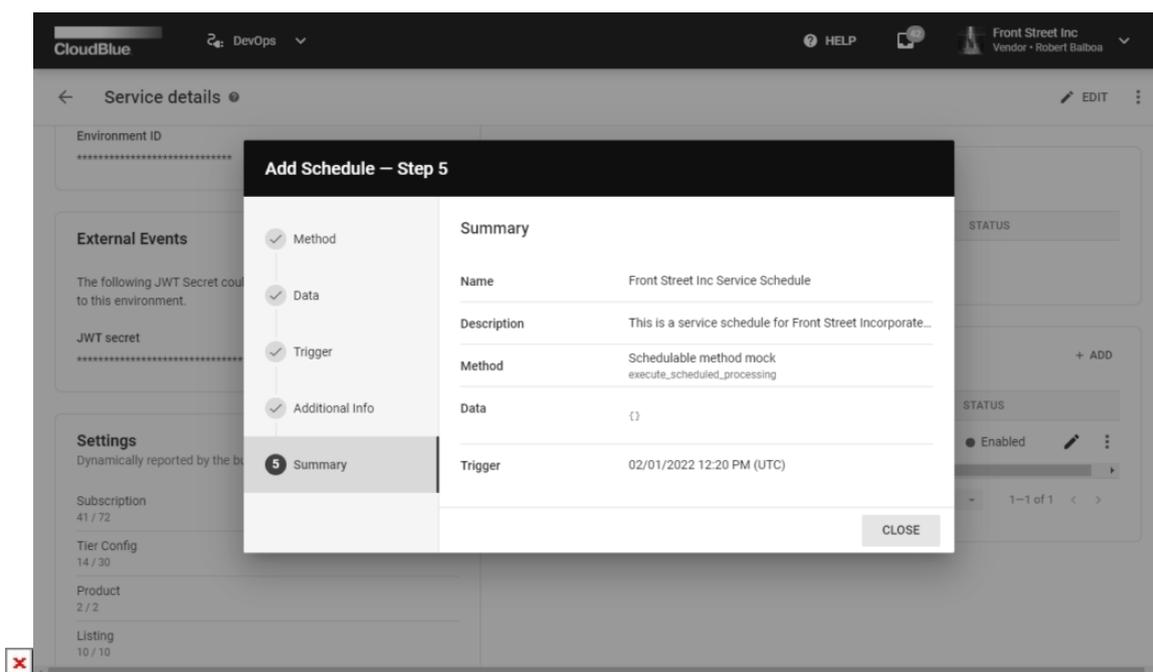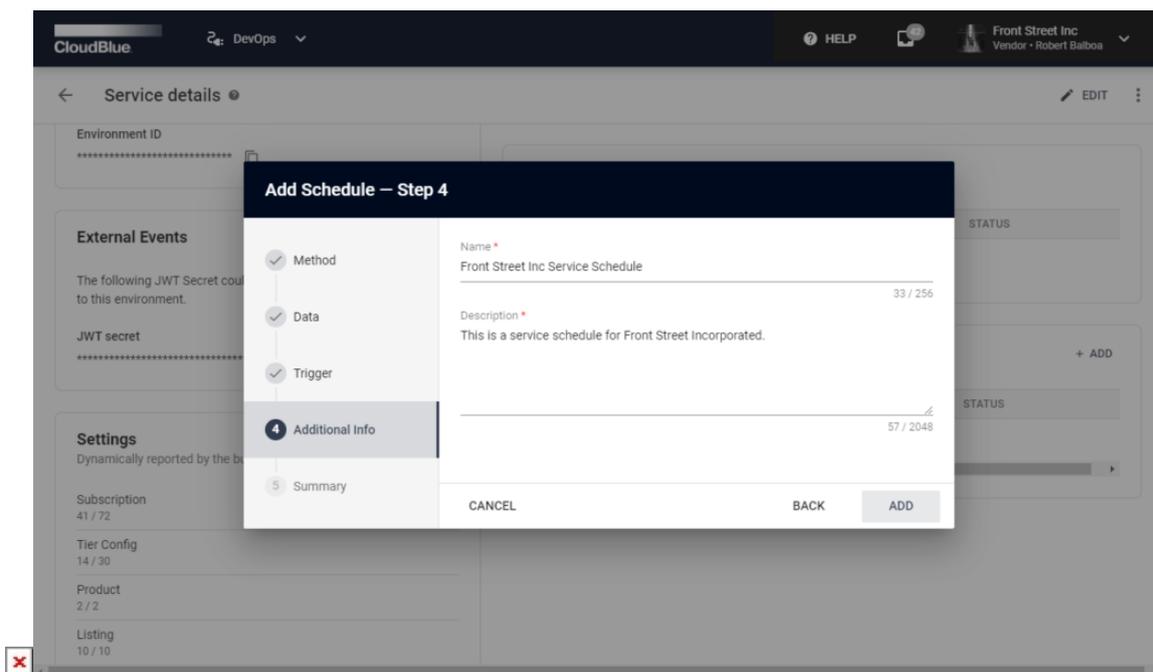

1. **Method:** The wizard prompts you to select your schedule method.
2. **Data:** Additional JSON data can be provided for your triggered action once the schedule is activated. In case no additional data is required, leave an empty JSON object.
3. **Trigger:** This step allows configuring a trigger for your schedule. The system also requires selecting one of the following trigger types:
 - o *One time:* Specify date and time for one time trigger activation.



- *Recurring*: Configure recurring trigger activation by selecting this type. Thus, the system allows specifying the number of repeated activations (e.g., every hour/day/week/month, every 2 hours/days/weeks/months, etc.) and start date/time for your trigger activations. It is also possible to check the End Date checkbox and select date and time to stop your recurring trigger activations.

Note: In case the *monthly* schedule is selected, the system will automatically trigger activation at the beginning of each month. Therefore, if a different date is required, it is necessary to provide a cron expression for this task.

- *Advanced*: Provide an expression for your trigger. Such expressions usually represent strings that consist of six or seven subexpressions (fields). These subexpressions describe individual details of your schedule.

4. **Additional Info:** This wizard requires to enter a name and description for your schedule object.

Click the **Add** button to successfully create a schedule object. As a result, the system provides a summary for your created schedule object. Review the summary and click the **Close** button to finalize your schedule configuration